



Features

- · 25+ artisan finishes including 10+ PVD finishes
- · All brass construction including sprayhead
- · 360° rotating spout with magnetic sprayhead docking
- · One button control for aerated or spray stream
- · Spray jets have easy-to-clean surface
- · Quiet polymer-braided hose with rotating joint
- · Ceramic disc cartridge
- Max flow rate: 1.8 gpm (6.8 L/min)

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- Commonwealth of MA
- ADA compliant



K10-100-61 shown


c ES PMG

XX = Series handle

[279]

K10-100-XX

| Handle Style | Α | В | С |
|-----------------|----------|----------|----------|
| 33 | 7-15/16" | 4-1/8" | 3-13/16" |
| | [202] | [105] | [97] |
| 35 | 7-15/16" | 4-1/8" | 3-13/16" |
| | [202] | [105] | [97] |
| 48 | 7-7/8" | 4-1/16" | 3-9/16" |
| | [200] | [103] | [90] |
| 61 | 7-1/2" | 3-15/16" | 3-9/16" |
| | [329] | [100] | [229] |

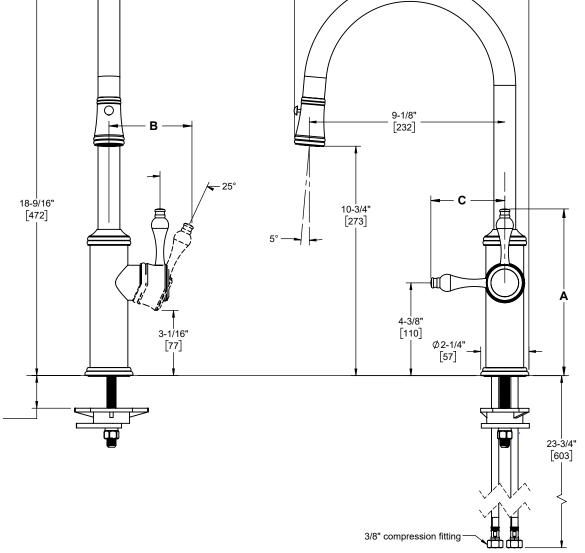

 Min
 Recommended
 Max

 Ø1-1/4
 Ø1-3/8
 Ø 1-3/8

 [32]
 [35]
 [35]

Specifications subject to change without notice

1-1/2" max [39]

(2-1/4" less spacer) [57]

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]