

Cast Deckmount Sink Faucets 8" Centers

TECK®
COMMERCIAL



Specification: (example)

- **HEAVY DUTY CAST BRASS** sink faucet
- 203mm (8") center two handle
- Polished chrome plated finish
- **BRASS** swing spout or
3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- Metal hold-down package
- Color indexed metal handles with vandal resistant screws
- **CER-TECK®** 1/4 turn ceramic structures
- and ... with ... (add spout required)
- with ... (add outlet required)
- with ... (add handle required)
- with ... (add suffix **-LS** if required – See Back Page)
- with ... (add suffix **-TI** if required – See Back Page)

26C3944



26C3133

Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.
CAST Deckmount	26C3



SPOUT	OUTLET	HANDLE
0 ☐	0 ☐	0 ☐
1 203mm (8") Wallform (S2) Swing Spout (2) ☐ 	1 ☐	1 Five Flute Handles ☐ 
2 203mm (8") Tubular (S5) Swing Spout (2) ☐ 	2 Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Antimicrobial By Agion® ☐ 	2 102mm (4") Hooded Blade Handles (5) ☐ 
3 ☐	3 Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator ☐ 	3 76mm (3") Lever Blade Handles (5) ☐ 
4 ☐	4 Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator ☐ 	4 102mm (4") Blade Handles, Sanitary Hoods (5) ☐ 
5 ☐	5 Vandal Resistant Non-Aerating Spray Outlet 0.5 USGPM (1.9 L/min.) ☐ 	5 152mm (6") Wrist Handles, Sanitary Hoods ☐ 
6 ☐	6 ☐	6 ☐
7 ☐	7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.1 USGPM (4.2 L/min.) (3) ☐ 	7 ☐
8 ☐	8 ☐	8 ☐
9 Heavy Duty 152mm (6") Bend Rigid/Swivel (R4) Gooseneck Spout (1) (4) ☐ 	9 ☐	9 ☐

(1) Available **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**. Note: Use this page front and back as a product submittal sheet. Flow Rates are at 60 PSI.
 (2) Available **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**. Refer to www.specselect.com for individual models.
 (3) This outlet can ONLY be added to **SPOUT Option No. 9**. (4) 120° limited Swing Spout available. Add Suffix **-LS**. (5) H/C Temperature Indicator Available. Add Suffix **-TI**.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.


CDSP-26C Rev. A

Approvals:


- CSA certified
 - Complies to ASME A112.18.1
 - Lever Blade Handles No. 2, 3, 4, and 5, ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- (Contact Delta Representative for State and/or Local Approvals.)

HANDLE TEMPERATURE INDICATORS

- ☐ Add suffix **"-TI"** to Product Number for handle temperature indicators "H" (red), "C" (blue).
- Available on handle options 2, 3 or 4 only.



FLOW RATE vs PRESSURE

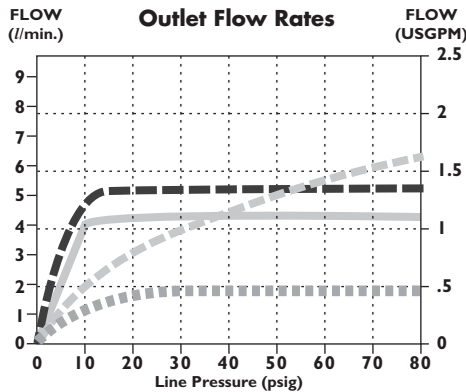

Spout Outlets

- No. 3 & 4 Aerator
- No. 2 Laminar Flow Outlet
- No. 7 Flow Control
- No. 5 Low Flow Outlet

FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See **DSP-R/S** for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)

FOR OPTIONAL SWING SPOUTS

See **DSP-S/S** for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)

INLETS - 1/2" MIP/Coupling Nuts


Note: Measurements may vary
± 6mm (0.25")

LIMITED SWING GOOSENECK

- ☐ Add suffix **"-LS"** to Product Number for 120° Limited Swing

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69

FRONT VIEW

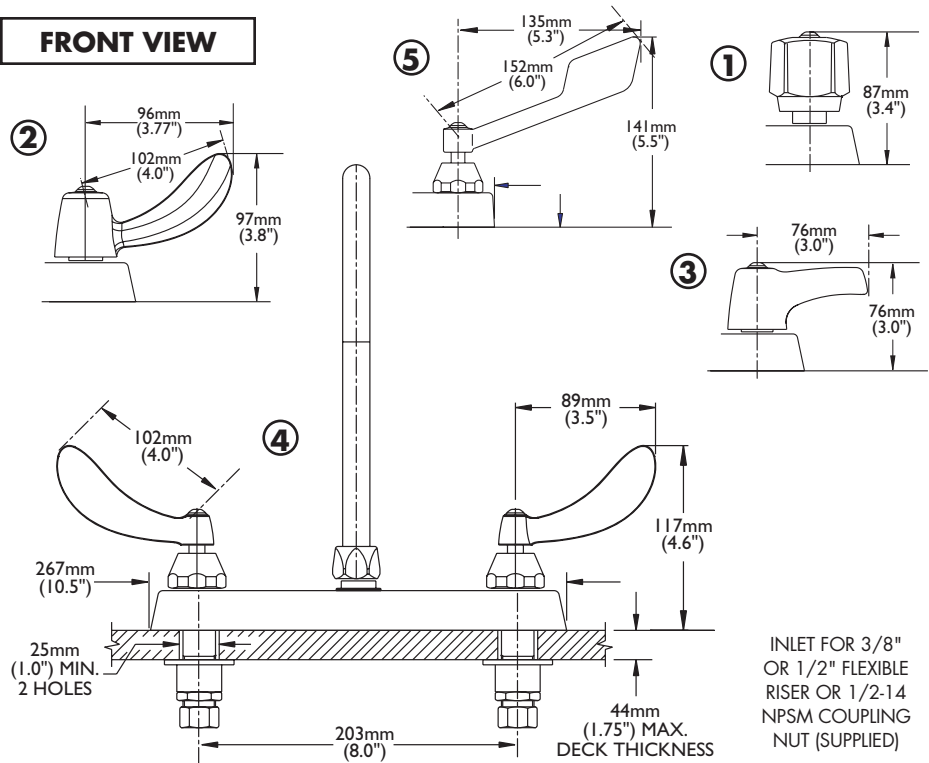


INLET FOR 3/8" OR 1/2" FLEXIBLE RISER OR 1/2-14 NPSM COUPLING NUT (SUPPLIED)


GOOSENECK SPOUT

Outlets #2, 3, 4 & 5

Outlet #7

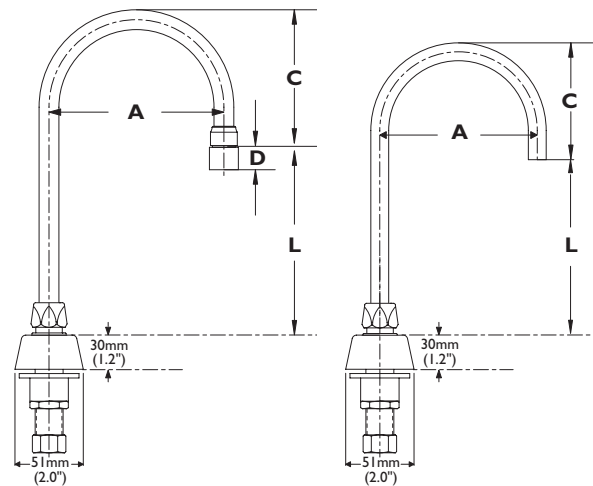

SWING SPOUT

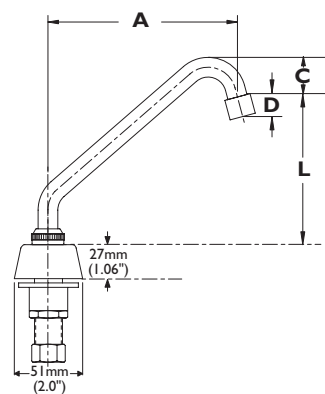

GOOSENECK SPOUT ASSEMBLY #9

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R4) for outlets #2, 3, 4 & 5	152	6	124	4.9	146	5.8
Gooseneck-Standard (R4) for outlet #7	152	6	117	4.6	152	6.0

SWING SPOUT ASSEMBLIES

SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8