
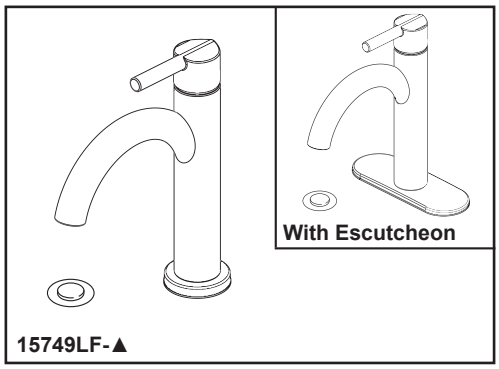


see what Delta can do℠

BATHROOM FAUCETS

- Nicoli® Collection
- Two Handle Deck Mount

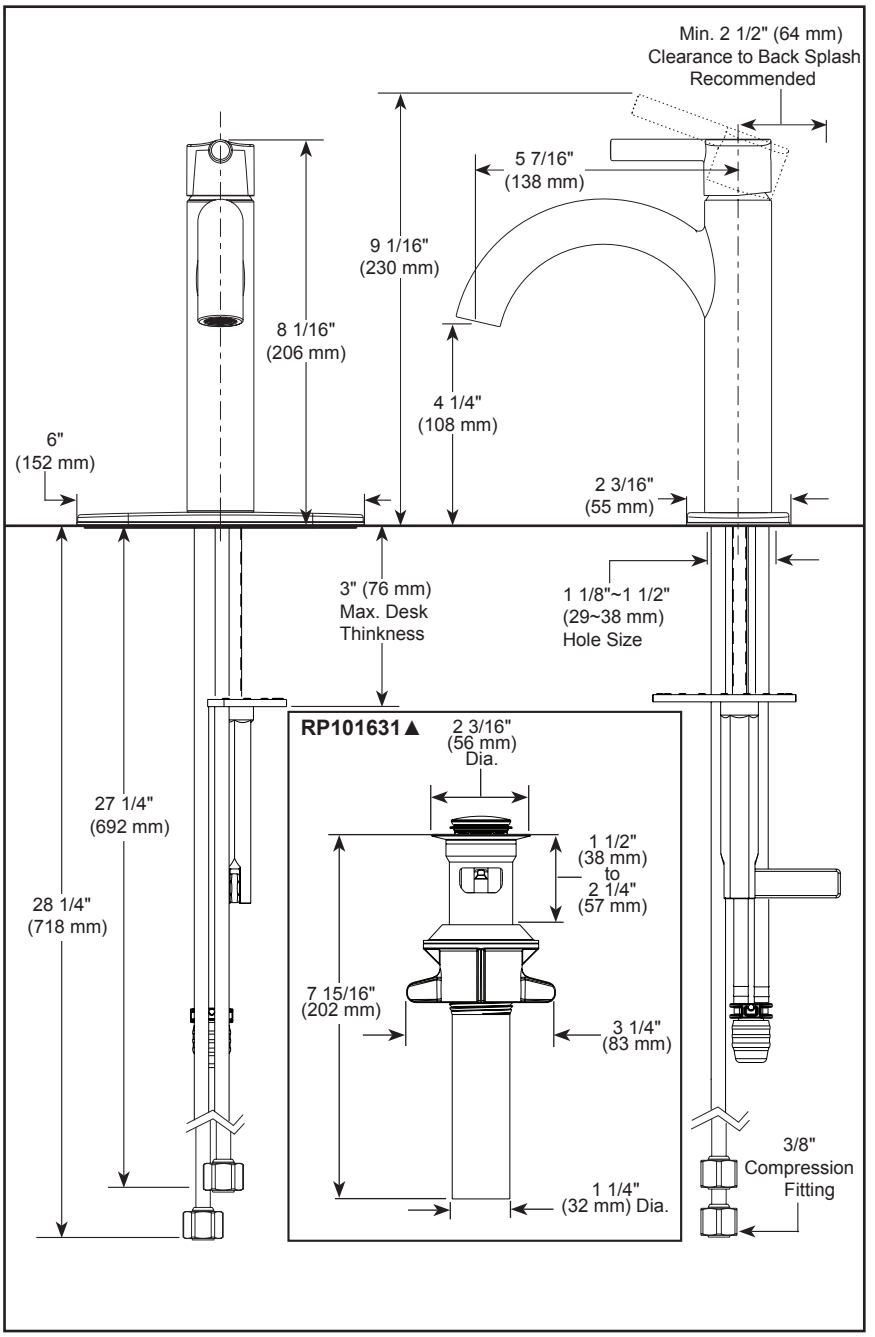

▲ Designate proper finish suffix

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- One or three hole mount (escutcheon included)
- 1/4" O.D. straight, staggered PEX supply lines
- Control mechanism is replaceable cartridge with ceramic plates
- Model has plastic drain with push pop-up type fitting with plated flange and stopper, no lift rod hole

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

WaterSense • Meets EPA Criteria • Certified by CSA Group


COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- NSF/ANSI/CAN 61 & 372
- EPA WaterSense®
- ♿ ICC/ANSI A117.1 - Valve control only

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company


DSP-L-15749LF Rev. F

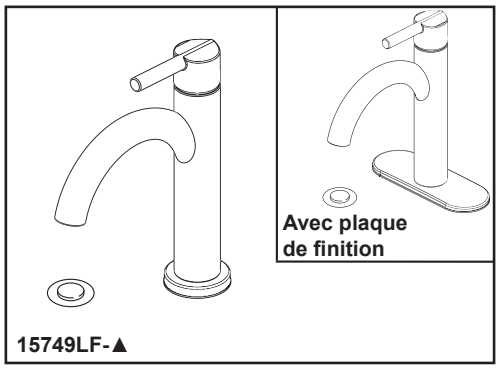

voyez ce que Delta peut faire℠

ROBINETS DE SALLE DE BAIN

- Collection Nicoli[MD]
- Deux poignées, installation sur le comptoir

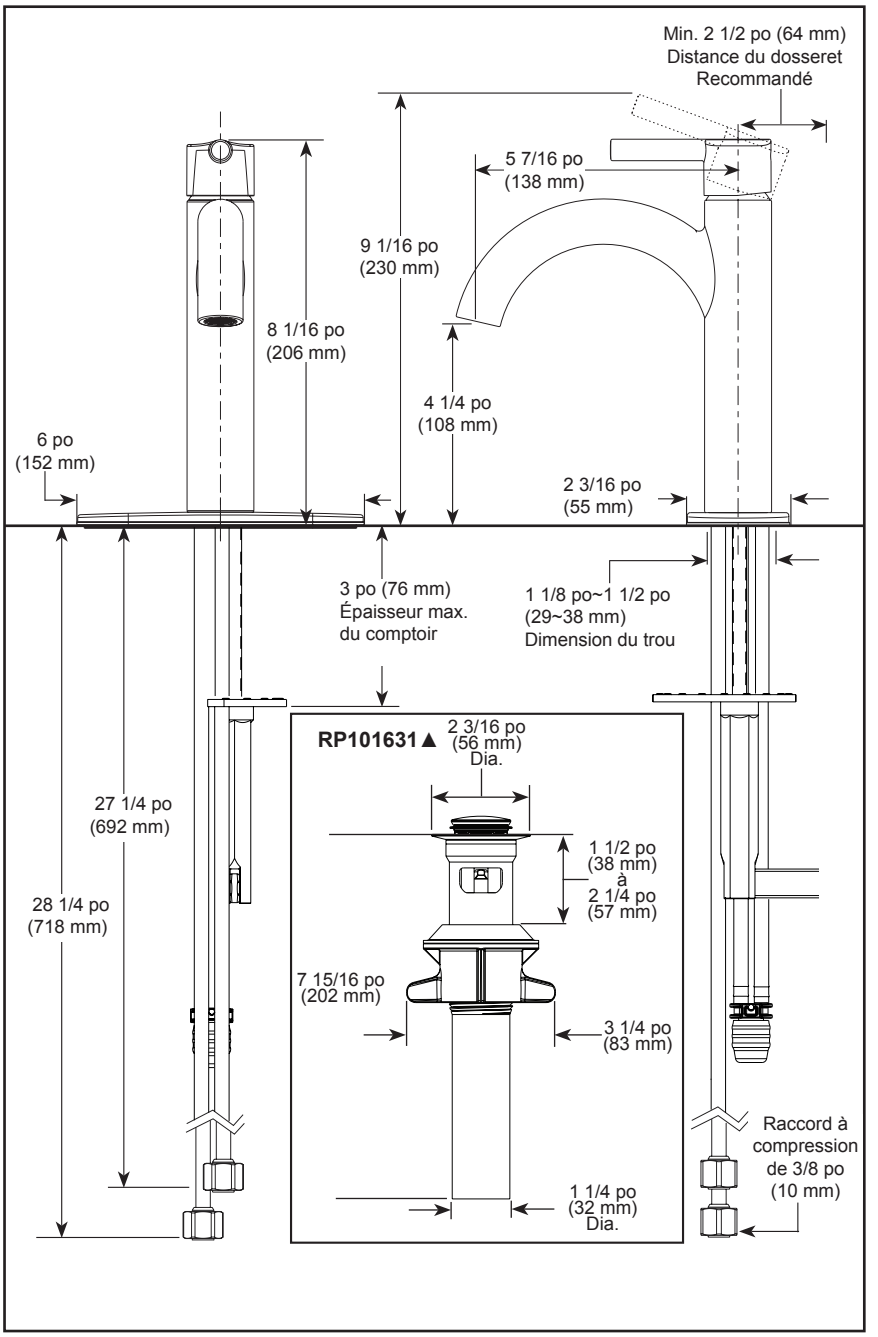

▲ Désigner le suffixe de finition approprié

SPÉCIFICATIONS STANDARDS :

- Débit maximal 1,2 gal./min à 60 psi, 4,5 L/min à 414 kPa
- Installation à un ou trois trous (plaque de finition incluse)
- Tuyaux d'alimentation PEX droits et décalés de 1/4 po (6mm) D.E.
- Le mécanisme de contrôle est une cartouche remplaçable avec des plaques en céramique
- Les modèles ont un drain en plastique de type à bouchon-poussoir avec bride et bouchon plaqués, sans trou pour tige de levage

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter le site fr.deltafaucet.ca pour tous les détails de notre garantie limitée.

WaterSense Meets EPA Criteria
Certified by CSA Group

CONFORME À :

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- NSF/ANSI/CAN 61 et 372
- EPA WaterSense[MD]
- ♿ ICC/ANSI A117.1 - Commande de soupape uniquement

Delta Faucet Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.deltafaucet.ca pour la disponibilité des produits et des options.

DSP-L-15749LF Rév. F

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company