WATER SHEET Cascade spout for wall-mounted installation - Brushed Platinum

SERIES-VARIOUS

13 415 979 Product version from 10/1/2023



- CASCADE, flow rate max. 7 gpm (at 3 bar)
- Function from: 5.9 gpm
- Descaling system

Technical data:

- Cover plate 9-1/2" x 2-3/8"
- 5-7/8" Projection
- 1/2" connection
- Plug-in connection mounting

Notes:

Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO, COYA

Brushed Platinum	13 415 979-06
Chrome	13 415 979-00
Platinum	13 415 979-08
Dark Chrome	13 415 979-19
Light Gold (PVD)	13 415 979-26
Brushed Light Gold (PVD)	13 415 979-27
Brushed Durabrass (23kt Gold)	13 415 979-28
Matte Black	13 415 979-33
Brushed Gold (PVD)	13 415 979-37
Brushed Dark Brass (PVD)	13 415 979-39
Brushed Bronze (PVD)	13 415 979-42
Brushed Dark Bronze (PVD)	13 415 979-43
Brushed Champagne (22kt Gold)	13 415 979-46
Champagne (22kt Gold)	13 415 979-47
Brushed Chrome	13 415 979-93
Brushed Dark Platinum	13 415 979-99


Required article

Rough-in adapter -	35 080 970-90 0010


WATER SHEET Cascade spout for wall-mounted installation - Brushed Platinum

SERIES-VARIOUS


13 415 979 Product version from 10/1/2023
mm [inches]

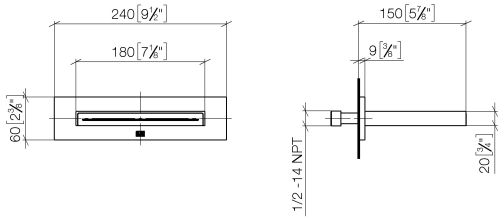

Flow rate chart

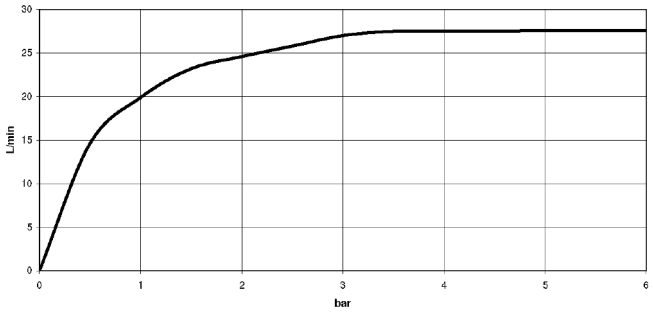

Trajectory length diagram

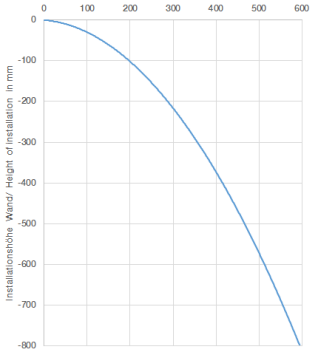



Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen	

WATER SHEET Cascade spout for wall-mounted installation - Brushed Platinum

SERIES-VARIOUS

13 415 979 Product version from 10/1/2023

Certificates and sustainability


LGA_19 WRAS_2306 IAPMO_4976

DORN BRACHT

WATER SHEET Cascade spout for wall-mounted installation - Brushed Platinum

SERIES-VARIOUS

13 415 979 Product version from 10/1/2023

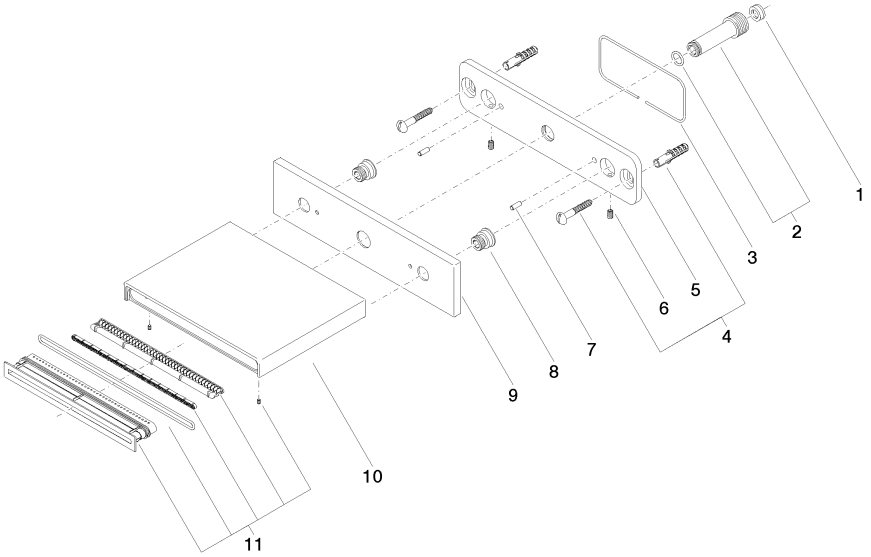

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
7	09 31 11 040 90	pin	2.00	14
3	09 14 03 134 90	seal	1.00	14
8	09 24 03 214 90	nipple	2.00	14
4	04 30 31 024 01 90	fixing set	1.00	14
10	09 11 78 003 20-06	spout	1.00	26
6	09 31 11 036 90	pin	2.00	14
5	09 17 97 059 90	holder	1.00	14
11	90 29 03 059 00 90	insert	1.00	14
1	09 23 01 057 90	flow reducer	1.00	14
2	90 24 03 213 00 90	connection	1.00	14