WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS

13 425 979



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO, COYA

- Pearlstream
- Flow rate max. 2.5 gpm (at 3 bar)
- Function from: 1.5 gpm
- Descaling system

Technical data:

- Plate 9-1/2" x 2-3/8"
- 7/8" Projection
- Connection 1/2", can be cut to length
- Plug-in connection mounting

Notes:

Dark Chrome	13 425 979-19
Chrome	13 425 979-00
Brushed Platinum	13 425 979-06
Platinum	13 425 979-08
Light Gold (PVD)	13 425 979-26
Brushed Light Gold (PVD)	13 425 979-27
Brushed Durabrass (23kt Gold)	13 425 979-28
Matte Black	13 425 979-33
Brushed Gold (PVD)	13 425 979-37
Brushed Dark Brass (PVD)	13 425 979-39
Brushed Bronze (PVD)	13 425 979-42
Brushed Dark Bronze (PVD)	13 425 979-43
Brushed Champagne (22kt Gold)	13 425 979-46
Champagne (22kt Gold)	13 425 979-47
Brushed Chrome	13 425 979-93
Brushed Dark Platinum	13 425 979-99


Required article

Rough-in adapter -	35 080 970-90 0010


WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS


13 425 979
mm [inches]

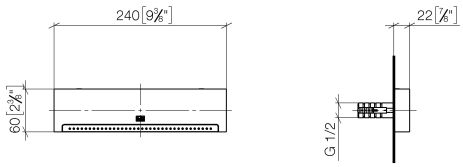

Flow rate chart

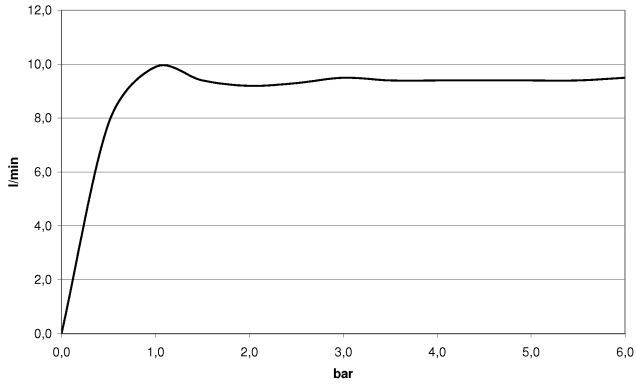

Trajectory length diagram

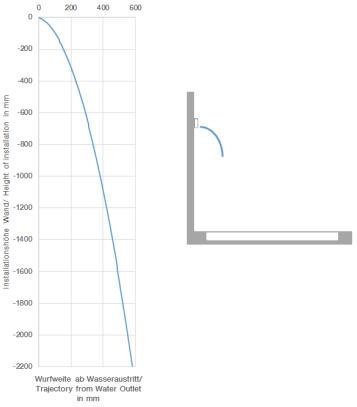

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822

Ü-Zeichen

DORN BRACHT

WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS

13 425 979

Certificates and sustainability

LGA_19	IAPMO_4976

DORN BRACHT

WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS

13 425 979

