

7.8 cu. ft. Mega Capacity Ventless Smart Front Load Dryer with Dual Inverter HeatPump™ Technology

- 7.8 cu. ft. Mega Capacity
- Ventless Design
- Dual Inverter Heat Pump™ Technology
- Auto Cleaning Condenser™
- Built-In Intelligence: AI Sensor Dry with Infrared Sensor
- Closet Depth

KEY FEATURES

AVAILABLE COLORS

- WHITE
- BLACK STEEL



SMART APPLIANCE

ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



PRODUCT FEATURES

SUMMARY

Type	Front Load Dryer
Vent Type	Ventless
Dryer Type	Electric
Capacity	7.8 cu. ft.
Matching Washer	WM4000HBA, WM4000HWA
Sensor Dry	Yes
Steam	No
Available Color	Black Steel (B) White (W)

APPEARANCE

Control & Display	Electronic Control Panel with LED Display
Dial-A-Cycle®	Yes
Touch Buttons	Yes

DRYER PROGRAMS

No. of Programs	12
	Normal, AI Dry, Heavy Duty, Delicates, Bedding, Shrinkage Relief, Perm. Press, Power Dry, Towels, Small Load, Silent Dry, Downloaded
No. of Options	11
	Wrinkle Care, Control Lock, Wi-Fi, Remote Start, Drum Light, Signal, Damp Signal, Drum Care, Condenser Care, More Time, Less Time
Temperature Setting	No
Drying Levels	Very, More, Normal, Less, Damp
Dry Mode	Normal, Energy Save, Speed
Manual Dry Times	30/40/50/60/70min

FABRIC CARE FEATURES

AI Sensor Dry	Yes
AI Dry with IR Sensor (Sensor Dry 2.0)	Yes
Precise Temperature Control with Variable Compressor	Yes
Steam	No

CONVENIENCE FEATURES

End of Cycle Signal	Yes
Drum Light (Door open)	Yes
Reversible Door	No
Wrinkle Care Option	Yes
Control Lock	Yes
4 Adjustable Legs	Yes
Remaining Time Display/Status Indicator(s)	Yes
Auto Cleaning Condensor	Yes

SMART FEATURES (ThinQ® TECHNOLOGY)

Smart Diagnosis (v3.0)	Yes
WiFi	Yes
NFC Tag On Technology	No
ThinQ Care	Yes
ThinQ Up	No
Remote Start/Cycle Monitor	Yes
Energy Monitoring	Yes

ENERGY

ENERGY STAR® Certified	Yes
ENERGY STAR® Most Efficient	Yes
CEF	9. x

MATERIALS

Aluminized Alloy Steel Drum	No
NeveRust® Stainless Steel Drum	Yes
Cabinet	Painted Steel
Door	Tempered Glass Door

POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	240V, 830W or 208V, 820W 15 Amp Circuit
Type	Heat Pump
Plug	Not Included
Plug Type	4-Wire or 3-Wire (Homes built after 1996 require 4-Wire)

OPTIONS

Stacking Kit	KSTK4
Pedestal	WDP6B/ WDP6W
Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Sealing Cover (Cap Cover)	Yes


LIMITED WARRANTY

Parts & Labor	1 Year
Drum	3 Years
Inverter Compressor & Motor	10 Years

UPC CODES

DLHC4002B (Black Steel)	195174098486
DLHC4002W (White)	195174098479

DIMENSION / CLEARANCES

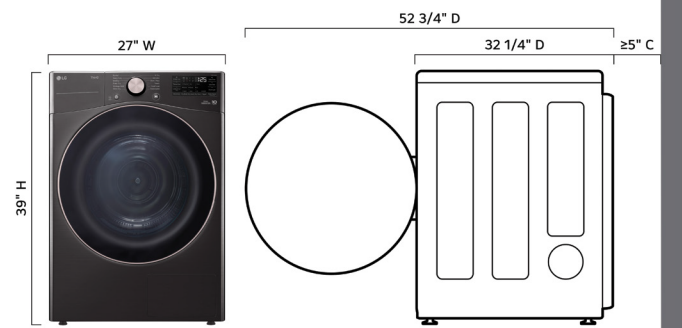

DIMENSIONS	
Product (WxHxD)	27" x 39" x 32 1/4"
Depth with Door Open	52 3/4"
Cutout Dimensions (WxHxD)	29" x 39" x 37 1/4"
Carton Dimensions (WxHxD)	30 1/6" x 42 3/4" x 33 9/16"
Approx. Weight (Product / Carton)	165lbs. / 171.5lbs.


DIMENSION / CLEARANCES

CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310cm<sup>2</sup>) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm<sup>2</sup>) must be installed no more than one foot above the floor. Install vent grills in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

INSTALLATION SPACING FOR RECESSED AREA OR CLOSET, WITH STACKED WASHER AND DRYER

- These clearances are recommended for this dryer.
- There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise.
  - No other fuel-burning appliance can be installed in the same closet as a dryer.

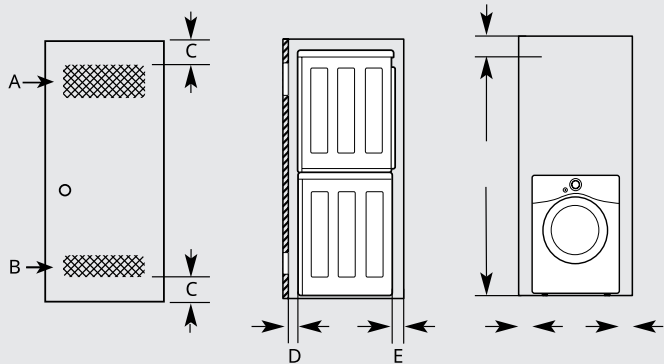


DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Front Clearance	≥ 1" (25 mm)
E Back Clearance	≥ 5 1/2" (140 mm)
F Top Clearance to the Ceiling	≥ 6" (152 mm)
G Height to the Top of Stacked Appliances*	78" (1980 mm)
H Side Clearance	≥ 1" (25mm)
J Width	27" (700 mm)

\*Differs depending on the washer dimensions.

DIMENSION / CLEARANCES

SPACING FOR RECESSED AREA OR CLOSET INSTALLATION

- These clearance are recommended for this dryer.
- Additional clearance should be considered for ease of installation and servicing.
  - Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

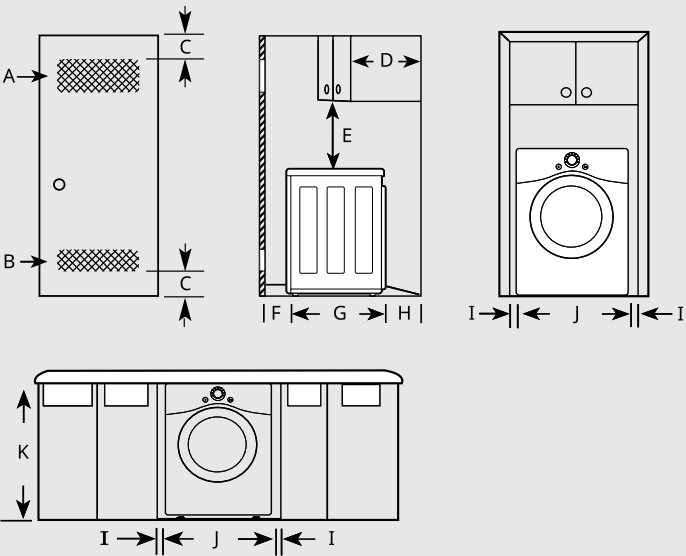


DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Front Clearance	1" (25 mm)
G Depth	32 1/4" (820 mm)
H Back Clearance	≥ 5" (127 mm)
I Side Clearance	≥ 1" (25 mm)
J Width	27" (700 mm)
K Height of Cabinet Opening	39" (990 mm)

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET AND CLEARANCES WITH OPTIONAL PEDESTAL BASE

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

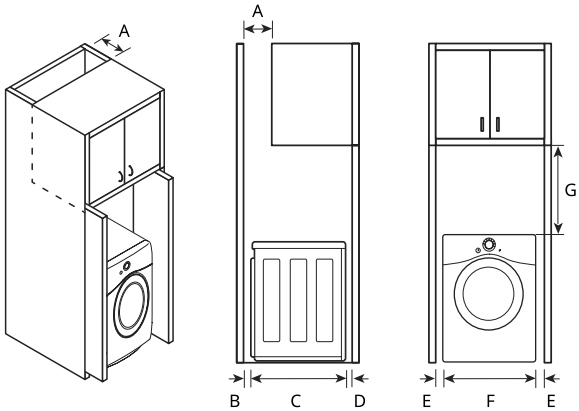

DIMENSIONS	
A Depth of Ventilation Opening	≥ 7" (178 mm)
B Back Clearance	≥ 5" (127 mm)
C Depth	32 1/4" (820 mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (700mm)
G Clearance to the Top of Cabinet	≥ 9" (229 mm)