

LG Styler® Smart Steam Closet with Dual TrueSteam® Technology and Dynamic MovingHanger™

Dual TrueSteam® Technology QuickRefresh™ Dynamic MovingHanger™ Plug & Go Design Dual Inverter HeatPump™ AutoFresh System™

AVAILABLE COLORS



Refresh

Warm Blankets

Static Removal

BEIGE



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential
- ThinQ Care issues to find proactive solutions before problems arise.

 Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
 - Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.





Beige
PCM
Texture Western Black
Full Touch Buttons & LED Display
18:88
3-19 Hours
Ventless with Inverter HeatPump System
Yes (Dual TrueSteam)
Yes
350
Yes
Yes (1)
Yes
Yes
No
Yes
Yes
Normal / Time Dry
Light / Normal / Heavy
Normal / Heavy Duty
S
Baby Clothes, Bedding/ Pillow, Doll, Suit, School Uniform
Fur/ Leather, Jeans, Old Clothes, Padded Coat, Pants, Scarf,
Rain / Snow Swimsuite, Wool / Knitwear, Yoga Outfit

Wet

Yes

ADDITIONAL OPTIONS	
Night Care	Yes
Delay Start	Yes
Control Lock	Yes
SMART FEATURES (ThinQ® 1	rechnology)
ThinQ (Wi-Fi)	Yes
Remote Start and Cycle Monitor	Yes
Download Cycle	Yes
Smart Diagnosis	Yes
Energy Monitoring	Yes
Voice Control (3rd Party Device)	No
POWER SOURCE	
Electrical Requirements	120V, 60Hz, 12.5A
Plug	Included
Plug Type	3 Prong
DIMENSIONS & WEIGHTS	
Dimensions (WxHxD)	23 5/8" x 77 3/8" x 24 3/8"
Product Depth with door open 90°	46 7/8"
Carton Dimensions (WxHxD)	28 1/4" x 80 3/4" x 27 5/8"
Weight	187.4 lbs
Carton Weight	207.2 lbs
OPTIONS & ACCESSORIES	
Regular Hanger (Qty)	5
Pants Hanger (Qty)	No
Shelf (Qty)	1
Drip Tray	1
Anti-Tip Kit (Qty)	No
Rear Leveling Feet	2
Carpet Install Spike	4
UPC CODE	
SC5MAR4G	8806096364383

SC5MAR4G



DIMENSION / CLEARANCES




DIMENSIONS	in	mm
A	21	535
В	61 3/4	1570
С	15 1/2	395
D	77 3/8	1965
E	23 5/8	600
F	24 3/8	620
G	46 7/8	1190

DIMENSION / CLEARANCES

RECOMMENDED INSTALLATION SPACING

The following clearances are recommended for the appliance. Although the appliance has been tested for clearances of 1 3/16 in. (3 cm) on the sides and rear, recommended clearances should be considered for the following reasons:

- 1 Allow at least 24in. (61cm) in front to open the door.
- 2 Allow at least 2in. (5cm) on both sides and between the back of the appliance and the wall.
- Allow at least 7 3/4 in. (20cm) between the top of the appliance and any overhanging shelves or cabinets.




DIMENSION / CLEARANCES

SPACING FOR RECESSED AREA OR CLOSET INSTALLTAION

There should be at least a little space around the appliance (or any other appliance) to avoid contact with walls, furniture, or other appliances during operation.

Allow a minimum of 1 3/16 in. (3 cm) on all sides of the appliance to avoid increased noise or damage.

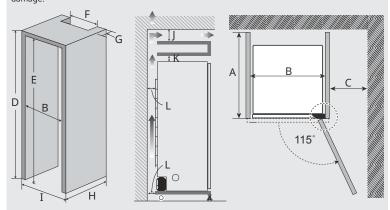


DIMENSIONS	in	mm
А	≥ 27 1/8	≥ 690
В	≥ 26 3/8	≥ 670
С	≥ 10	≥ 250
D	≥ 78 7/8	≤ 2004
E	≥ 78 3/8	≥ 1990
F	≥ 21 13/16	≥ 555
G	≥ 2	≥ 50
Н	≥ 26 3/8	≥ 670
I I	≥ 25 1/4	≥ 640
J	≥ 2	≥ 50
K	≥ 1	≥ 25
L	≥2	≥50

DIMENSION / CLEARANCES

Closet Ventilation Requirement

Closets with doors must have both an upper and lower vent to prevent heat and moisture build-up in the closet.



- ① Upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 ft. (185 cm) above the floor.
- 2 Lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor.