REMOTE CONTROL

OWNER'S MANUAL

element®

IMPORTANT NOTE:

Thank you for purchasing our air conditioner. Please read this manual carefully before operating your new air conditioning unit. Make sure to save this manual for future reference.

Table of Contents

Remote Control Specifications 02

Handling the Remote Control 03

Buttons and Functions 04

Remote Screen Indicators 08


How to Use Basic Functions 09

How to Use Advanced Functions 12

Remote Control Specifications

Model	RG51G(1)/CEFU1,RG51G(1)/EFU1,RG51G1(1)/EFU1, RG51G4(1)/EU1,RG51G5(1)/EU1, RG51G4(1)/CEU1 RG51G5(1)/CEU1
Rated Voltage	3.0V(Dry batteries R03/LR03×2)
Signal Receiving Range	8m
Environment	23℉~140℉ (-5℃~60℃)

Quick Start Guide

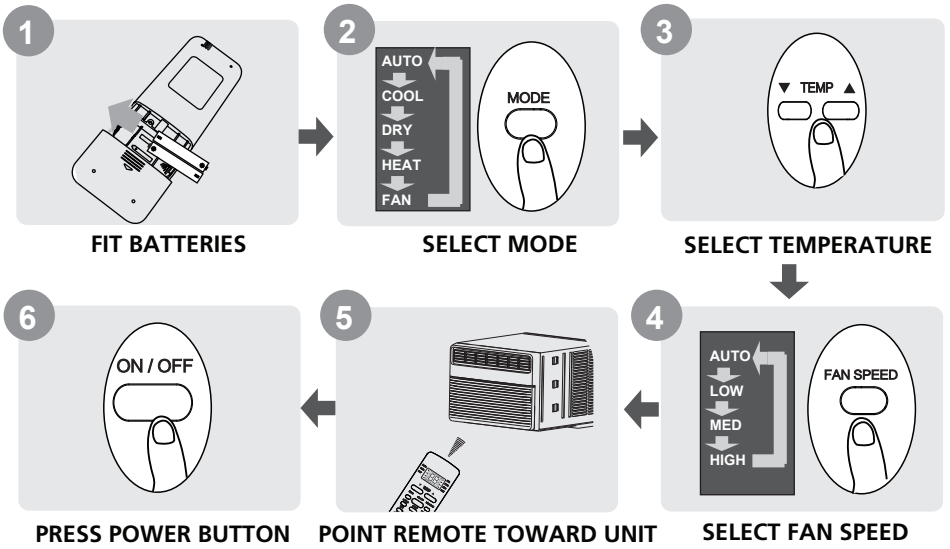

NOT SURE WHAT A FUNCTION DOES?

Refer to the **How to Use Basic Functions** and **How to Use Advanced Functions** sections of this manual for a detailed description of how to use your air conditioner.

SPECIAL NOTE


- Button designs on your unit may differ slightly from the example shown.
- If the indoor unit does not have a particular function, pressing that function's button on the remote control will have no effect.
- When there are wide differentces between "Remote control Manual" and "USER'S MANUAL" on function description, the description of "USER'S MANUAL" shall prevail.

Handling the Remote Control

Inserting and Replacing Batteries

Your air conditioning unit may come with two batteries(some units). Put the batteries in the remote control before use.

1. Slide the back cover from the remote control downward, exposing the battery compartment.
2. Insert the batteries, paying attention to match up the (+) and (-) ends of the batteries with the symbols inside the battery compartment.
3. Slide the battery cover back into place.

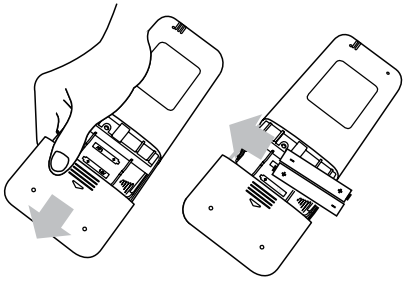

BATTERY NOTES

For optimum product performance:

- Do not mix old and new batteries, or batteries of different types.
- Do not leave batteries in the remote control if you don't plan on using the device for more than 2 months.

BATTERY DISPOSAL

Do not dispose of batteries as unsorted municipal waste. Refer to local laws for proper disposal of batteries.

TIPS FOR USING REMOTE CONTROL

- The remote control must be used within 26 feet of the unit.
- The unit will beep when remote signal is received.
- Curtains, other materials and direct sunlight can interfere with the infrared signal receiver.
- Remove batteries if the remote will not be used more than 2 months.

NOTES FOR USING REMOTE CONTROL

The device could comply with the local national regulations.


- In Canada, it should comply with CAN ICES-3(B)/NMB-3(B).
- In USA, this device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
  (1) This device may not cause harmful interference, and
  (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- Changes or modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.

Buttons and Functions

Before you begin using your new air conditioner, make sure to familiarize yourself with its remote control. The following is a brief introduction to the remote control itself. For instructions on how to operate your air conditioner, refer to the How to Use Basic Functions section of this manual.

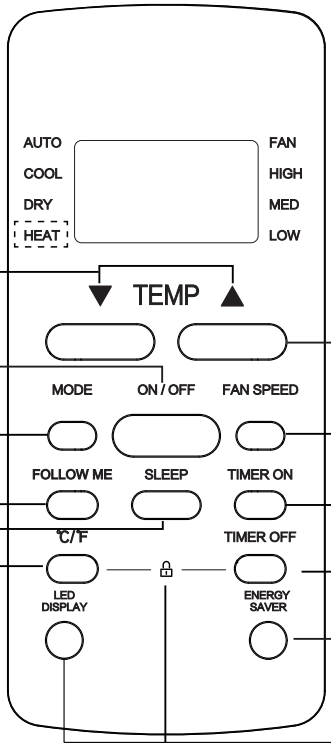

TEMP ▼
Decreases temperate in1˚F (1˚C) increments. Min. temperature is 62˚F(17˚C).

ON/OFF
Turns the unit on or off.

MODE
Scrolls through operation modes as follows:
AUTO → COOL → DRY → HEAT → FAN

NOTE: Please do not select HEAT mode if the machine you purchased is cooling only type. Heat mode is not supported by the cooling only appliance.

FOLLOW ME
Press this button to activate the FOLLOW ME mode.

SLEEP
Saves energy during sleeping hours.

°C/°F
The temperature display between the ˚C & ˚F.

TEMP ▲
Increases temperate in1˚F (1˚C) increments. Max. temperature is 86˚F(30˚C).

FAN SPEED
Selects fan speeds in the following order:
AUTO → LOW → MED→HIGH

TIMER ON
Sets timer to turn unit on (see How to Use Basic Functions for instructions).

TIMER OFF
Sets timer to turn unit off (see How to Use Basic Functions for instructions).

ENERGY SAVER
Press this button to activate the Energy saving mode. Press it again to stop the funtion.

LED DISPLAY
Turns indoor unit's LED display and air conditioner buzzer on and off (model dependent), which create a comfortable and quiet environment.

LOCK
Press together ˚C/˚F & TIMER OFF buttons simultaneously for 5 seconds to lock the keyboard. Press together the two buttons for 2 seconds to unlock the keyboard.

Model: RG51G(1)/CEFU1
RG51G(1)/EFU1

NOTE: Model RG51G(1)/CEFU1 does not have HEAT feature.

TEMP ▼
Decreases temperate in 1˚F (1˚C) increments. Min. temperature is 62˚F(17˚C).

ON/OFF
Turns the unit on or off.

MODE
Scrolls through operation modes as follows:
AUTO → COOL → DRY → HEAT → FAN

NOTE: Please do not select HEAT mode if the machine you purchased is cooling only type. Heat mode is not supported by the cooling only appliance.


FOLLOW ME
Press this button to activate the FOLLOW ME mode.

SLEEP
Saves energy during sleeping hours.

SHORT CUT
Sets and activates your favorite pre-settings.

FRESH
Press this button to activate the FRESH function. Press it again to stop the funtion.

°C/°F
The temperature display between the ˚C & ˚F.

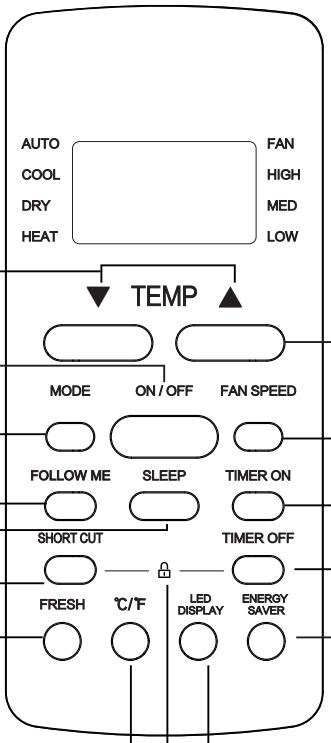

LOCK
Press together SHORT CUT & TIMER OFF buttons simultaneously for 5 seconds to lock the keyboard. Press together the two buttons for 2 seconds to unlock the keyboard.

TEMP ▲
Increases temperate in 1˚F (1˚C) increments. Max. temperature is 86˚F(30˚C).

FAN SPEED
Selects fan speeds in the following order:
AUTO → LOW → MED→HIGH

TIMER ON
Sets timer to turn unit on (see How to Use Basic Functions for instructions).

TIMER OFF
Sets timer to turn unit off (see How to Use Basic Functions for instructions).

ENERGY SAVER
Press this button to activate the Energy saving mode. Press it again to stop the funtion.

LED DISPLAY
Turns indoor unit's LED display and air conditioner buzzer on and off (model dependent), which create a comfortable and quiet environment.

RG51G1(1)/EFU1

TEMP ▼
Decreases temperate in1˚F (1˚C) increments. Min. temperature is 62˚F(17˚C).


ON/OFF
Turns the unit on or off.

MODE
Scrolls through operation modes as follows:
AUTO → COOL → DRY → HEAT → FAN

NOTE: Please do not select HEAT mode if the machine you purchased is cooling only type. Heat mode is not supported by the cooling only appliance.

ENERGY SAVER
Press this button to activate the Energy saving mode. Press it again to stop the funtion.

SLEEP
Saves energy during sleeping hours.

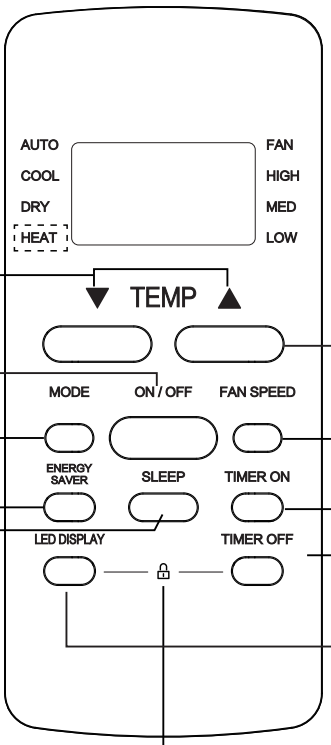

TEMP ▲
Increases temperate in1˚F (1˚C) increments. Max. temperature is 86˚F(30˚C).

NOTE: Press together ▲ & ▼ buttons at the same time for 3 seconds will alternatethe temperature display between the ˚C & ˚F.

FAN SPEED
Selects fan speeds in the following order:
AUTO → LOW → MED→HIGH

TIMER ON
Sets timer to turn unit on (see How to Use Basic Functions for instructions).

TIMER OFF
Sets timer to turn unit off (see How to Use Basic Functions for instructions).

LED DISPLAY
Turns indoor unit's LED display and air conditioner buzzer on and off (model dependent), which create a comfortable and quiet environment.

LOCK
Press together LED DISPLAY & TIMER OFF buttons simultaneously for 5 seconds to lock the keyboard. Press together the two buttons for 2 seconds to unlock the keyboard.

Model: RG51G4(1)/CEU1
RG51G4(1)/EU1

NOTE: Model RG51G4(1)/CEU1 does not have HEAT feature.

TEMP ▼
Decreases temperate in1˚F (1˚C) increments. Min. temperature is 62˚F(17˚C).

ON/OFF
Turns the unit on or off.


MODE
Scrolls through operation modes as follows:
AUTO → COOL → DRY → HEAT → FAN
NOTE: Please do not select HEAT mode if the machine you purchased is cooling only type. Heat mode is not supported by the cooling only appliance.

SHORTCUT
Used to restore the current settings or resume previous settings.

SLEEP
Saves energy during sleeping hours.

°C/°F
The temperature display between the ˚C & ˚F.

LED DISPLAY
Turns indoor unit's LED display and air conditioner buzzer on and off (model dependent), which create a comfortable and quiet environment.

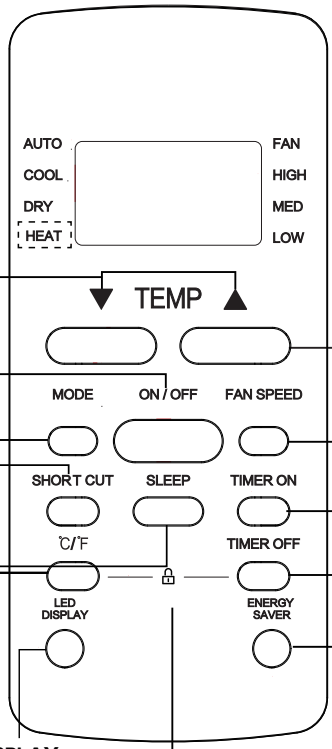

TEMP ▲
Increases temperate in1˚F (1˚C) increments. Max. temperature is 86˚F(30˚C).

FAN SPEED
Selects fan speeds in the following order:
LOW → MED→ HIGH

TIMER ON
Sets timer to turn unit on (see How to Use Basic Functions for instructions).

TIMER OFF
Sets timer to turn unit off (see How to Use Basic Functions for instructions).

ENERGY SAVER
Press this button to activate the Energy saving mode. Press it again to stop the funtion.


LOCK
Press together ˚C/˚F & TIMER OFF buttons simultaneously for 5 seconds to lock the keyboard. Press together the two buttons for 2 seconds to unlock the keyboard.

RG51G5(1)/EU1
RG51G5(1)/CEU1

NOTE: Model RG51G5(1)/CEU1 does not have HEAT feature.

Remote Screen Indicators

Information are displayed when the remote control is power up.

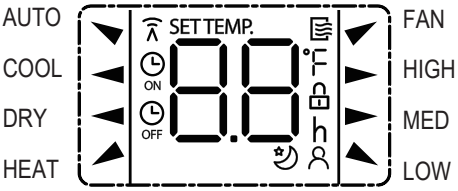

Mode display

AUTO COOL DRY

HEAT FAN

Displayed when data transmitted.

Displayed when remote controller is ON.

Displayed when TIMER ON time is set

Displayed when TIMER OFF time is set

Shows set temperature or room temperature, or time under TIMER setting

Indicated all the current settings are locked

Displayed when Follow Me feature is activated(some units)

Displayed when SLEEP feature is activated

Fan speed indication

HIGH	High speed
MED	Medium speed
LOW	Low speed
NO display	Auto fan speed

Note:


All indicators shown in the figure are for the purpose of clear presentation. But during the actual operation, only the relative function signs are shown on the display window.

How to Use Basic Functions

Basic operation

ATTENTION! Before operation, please ensure the unit is plugged in and power is available.

COOL Mode

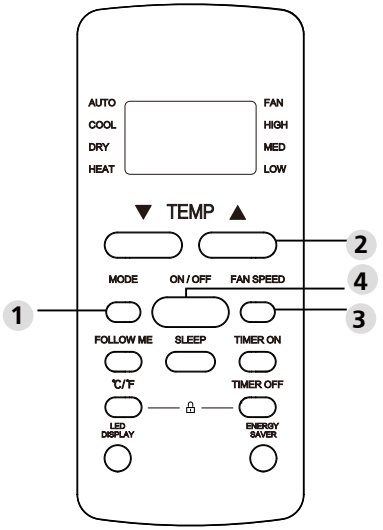


1. Press the MODE button to select **COOL** mode.
2. Set your desired temperature using the **TEMP ▲** or **TEMP ▼** button.
3. Press **FAN** button to select the fan speed: AUTO, LOW, MED or HIGH.
4. Press the **ON/OFF** button to start the unit.

SETTING TEMPERATURE

The operating temperature range for units is 62-86°F (17-30 °C).
You can increase or decrease the set temperature 1 °F (1 °C) increments.

AUTO Mode

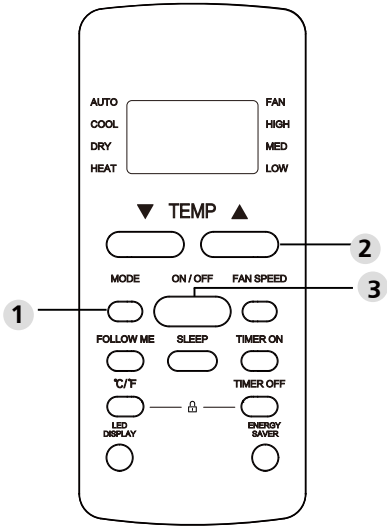

In AUTO mode, the unit will automatically select the COOL, FAN, or HEAT operation based on the set temperature.

1. Press the **MODE** button to select **AUTO**.
2. Set your desired temperature using the **TEMP ▲** or **TEMP ▼** button.
3. Press the **ON/OFF** button to start the unit.


NOTE: FAN SPEED can't be set in AUTO mode.

In AUTO mode, the unit will automatically select the COOL, FAN, HEAT or DRY function based on the set temperature.

1. Press the **MODE** button to select **AUTO**.
2. Set your desired temperature using the **TEMP ▲** or **TEMP ▼** button.
3. Press the **ON/OFF** button to start the unit.

NOTE: FAN SPEED can't be set in AUTO mode.


FAN Mode

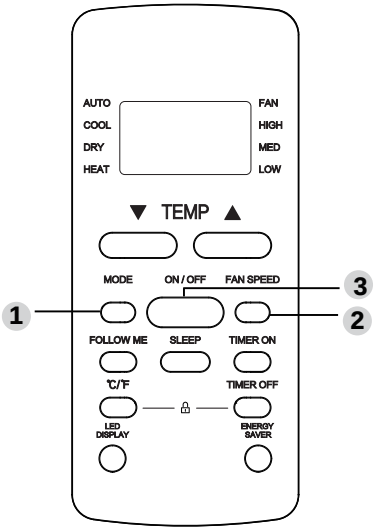

1. Press the **MODE** button to select **FAN** mode.
2. Press **FAN** button to select the fan speed: AUTO, LOW, MED or HIGH.
3. Press the **ON/OFF** button to start the unit.

NOTE: You can't set temperature in FAN mode. As a result, your remote control's LCD screen will not display temperature.


DRY Mode (dehumidifying)

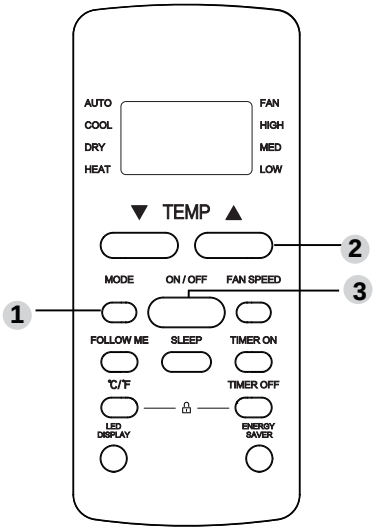

1. Press the **MODE** button to select **DRY**.
2. Set your desired temperature using the **TEMP ▲** or **TEMP ▼** button.
3. Press the **ON/OFF** button to start the unit.

NOTE: FAN SPEED cannot be changed in DRY mode.

HEAT Mode (some models)

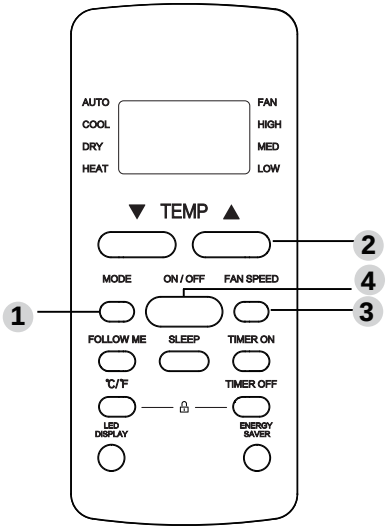

1. Press the **MODE** button to select **HEAT** mode.
2. Set your desired temperature using the **TEMP ▲** or **TEMP ▼** button.
3. Press **FAN** button to select the fan speed: AUTO, LOW, MED or HIGH.
4. Press the **ON/OFF** button to start the unit.

NOTE: As outdoor temperature drops, the performance of your unit's HEAT function may be affected. In such instances, we recommend using this air conditioner in conjunction with other heating appliances.

Setting the TIMER


TIMER ON/OFF - Set the amount of time after which the unit will automatically turn on/off.

TIMER ON setting

Press TIMER ON button to initiate the ON time sequence.

Press Temp. up or down button for for multiple times to set the desired time to turn on the unit.

Point remote to unit and wait 1sec, the TIMER ON will be activated.

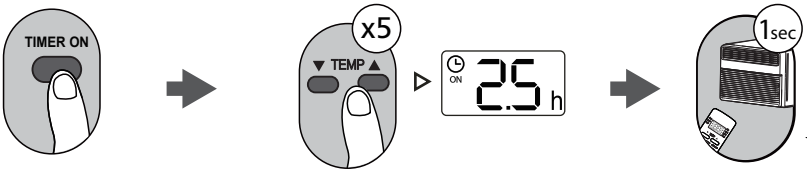


TIMER OFF setting

Press TIMER OFF button to initiate the OFF time sequence.

Press Temp. up or down button for for multiple times to set the desired time to turn off the unit.

Point remote to unit and wait 1sec, the TIMER OFF will be activated.

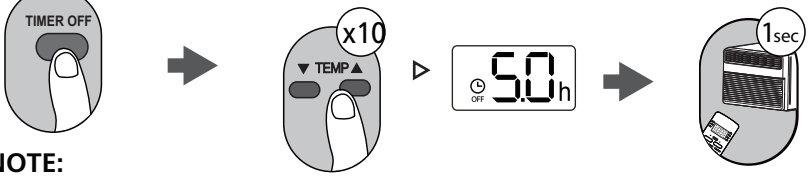



NOTE:

1. When setting the TIMER ON or TIMER OFF, the time will increase by 30 minutes increments with each press, up to 10 hours. After 10 hours and up to 24, it will increase in 1 hour increments. (For example, press 5 times to get 2.5h, and press 10 times to get 5h,) The timer will revert to 0.0 after 24.
2. Cancel either function by setting its timer to 0.0h.

TIMER ON & OFF setting(example)

Keep in mind that the time periods you set for both functions refer to hours after the current time.

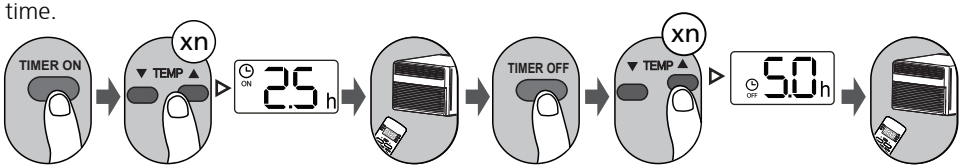

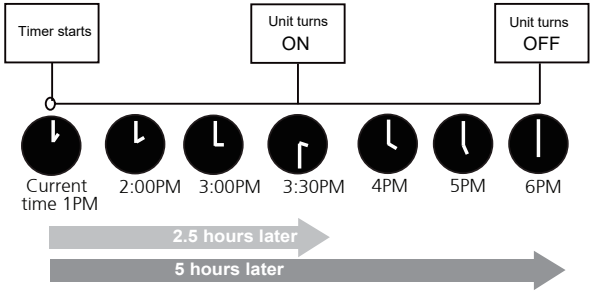

Example: If current timer is 1:00PM, to set the timer as above steps, the unit will turn on 2.5h later (3:30PM) and turn off at 6:00PM.

How to Use Advanced Functions

FOLLOW ME (some models)

Press FOLLOW ME button



When the FOLLOW ME function is activated, the remote display is actual temperature at its location. The remote control will send this signal to the air conditioner every 3 minutes interval until press the FOLLOW ME button again.

ENERGY SAVER function (some models)



Press Energy saver button to initiate this function.
This function is available on COOL, DRY, AUTO (only AUTO-COOLING and AUTO-FAN) modes.

°C/°F (some models)



Press this button will alternate the temperature display between the ℃ & ℉.

LED DISPLAY

Press LED button



Press this button to turn on and turn off the display on the indoor unit.

FRESH (some models)



When the FRESH function is initiated, the Ionizer/Plasma Dust Collector(depending on models) is energized and will help to remove pollen and impurities from the air.

SHORTCUT function(some models)



Used to restore the current settings or resume previous settings.(For some models)

Push this button when remote controller is on, the system will automatically revert back to the previous settings including operating mode, setting temperature, fan speed level and sleep feature(if activated).
If pushing more than 2 seconds, the system will automatically restore the current operation settings including operating mode, setting temperature, fan speed level and sleep feature (if activated).

SLEEP function



The SLEEP function is used to decrease energy use while you sleep (and don t need the same temperature settings to stay comfortable). This function can only be activated via remote control.
The sleep function is not available in Fan or Dry mode.Please refer to the OWNER'S MANUAL for more details.

APPENDIX A

EXAMPLE OF SUPPLIER'S DECLARATION OF CONFORMITY COMPLIANCE INFORMATION STATEMENT INCLUDED WITH AN END PRODUCT AT THE TIME OF MARKETING OR IMPORTATION[22]

NOTE: The Commission does not have a required SDoC format. This is an example only and is provided to illustrate the type of information that may be supplied with the product at the time of marketing or importation for meeting the FCC SDoC requirement Section 2.1077 compliance information.

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Unique Identifier: RG51G(1)/CEFU1,RG51G5(1)/CEU1

Responsible Party – U.S. Contact Information

Element Appliance Company, LLC

legal@elementelectronics.com

FCC Compliance Statement (*e.g.,* products subject to Part 15)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

[22] See 47 CFR § 2.1077.

The design and specifications are subject to change without prior notice for product improvement. Consult with the sales agency or manufacturer for details.