

7.3 cu. ft. Rear Control Top Load Dryer

- 7.3 cu.ft. Capacity
- Sensor Dry
- Precise Temperature Control with Variable Heater
- Aluminized Alloy Steel Drum
- LoDecibel™ Quiet Operation




AVAILABLE COLORS

ONYX BLACK



SUMMARY		CONVENIENCE FEATURES		POWER SOURCE	
Type	Rear Control Top Load Dryer	3 Minute Installation Check	Yes	Ratings	CSA Listed
Vent Type	Vented	LoDecibel® Quiet Operation	Yes	Electrical Requirements	Electric: 240V, 26A Gas: 120V, 60Hz, 5Amps
Dryer Type	Electric / Gas	End of Cycle Signal	Yes	Type	Electric/ Gas
Capacity	7.3 cu. ft.	Drum Light (door open)	No	Plug	Electric: Not Included Gas: Included
Matching Washer	WM7150CX	Reversible Door	Yes	Plug Type	Electric: 4-Wire or 3-Wire (Homes built after 1996 require 4-Wire) Gas: 3 Prong
Sensor Dry	Yes	FlowSense® Duct Clogging Indicator	Yes	BTU Rating	Electric: N/A Gas: 20,000
Steam	No	Wrinkle Care Option	Yes	OPTIONS	
Colors	Onyx Black (X)	Control Lock	Yes	LP Conversion Kit	Electric: N/A Gas: 383EEL3002R
DRYER PROGRAMS		SMART FEATURES (ThinQ® TECHNOLOGY)		Side Venting Kit	383EEL9001B
No. of Programs	8	Venting Option	Electric: 4 Way Venting Gas: 3 Way Venting	LIMITED WARRANTY	
	Normal, Perm Press, Heavy Duty, Bedding, Delicates, Speed Dry (Manual Dry), Air Dry (Manual Dry), Freshen Up (Manual Dry)	4 Adjustable Legs	Yes	Parts & Labor	1 Year
No. of Options	7	Remaining Time Display/Status Indicator(s)	Yes	Drum	3 Years
	Wrinkle Care, Control Lock, More Time, Less Time, Damp Dry Signal, Energy Saver, Signal	ENERGY		UPC CODES	
Temperature Setting	High, Medium, Low	ENERGY STAR® Certified	Yes	DLE7150X (Electric)	195174142349
Drying Levels	Very Dry, Normal Dry, Damp Dry	CEF	Electric: 3.94 Gas: 3.49	DLG7151X (Gas)	195174144343
Manual Dry Times	60 min., 40 min., 20 min., More Less Time	MATERIALS			
APPEARANCE		Aluminized Alloy Steel Drum	Yes		
Control & Display	Electronic Control Panel with LED Display	NeveRust® Stainless Steel Drum	No		
EasyLoad® Door	No	Drum Rear	Painted		
Dial-A-Cycle®	Yes	Cabinet	Painted Steel		
FABRIC CARE FEATURES		Door / Trim	Transparent Glass / Black painted		
Sensor Dry	Yes	All Available Colors	Onyx Black(X), Middle Black (M), White (W)		
Precise Temperature Control with Variable Heater	Yes				
Steam	No				

DIMENSION / CLEARANCES

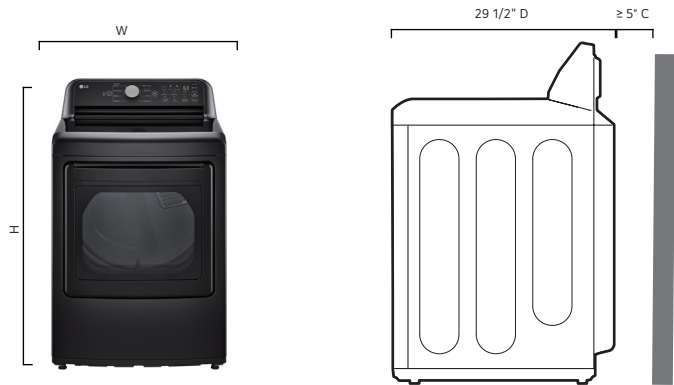

DIMENSIONS	
Product (WxHxD)	27" x 44 1/2" x 29 1/2" (50 1/4" D with door open)
Carton (WxHxD)	29" x 46 1/2" x 31 3/8"
Weight (Product)	Electric: 111.3 lbs. Gas: 114 lbs.
Weight (Carton)	Electric: 121.6 lbs. Gas: 125.3 lbs.

DIMENSION / CLEARANCES


CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

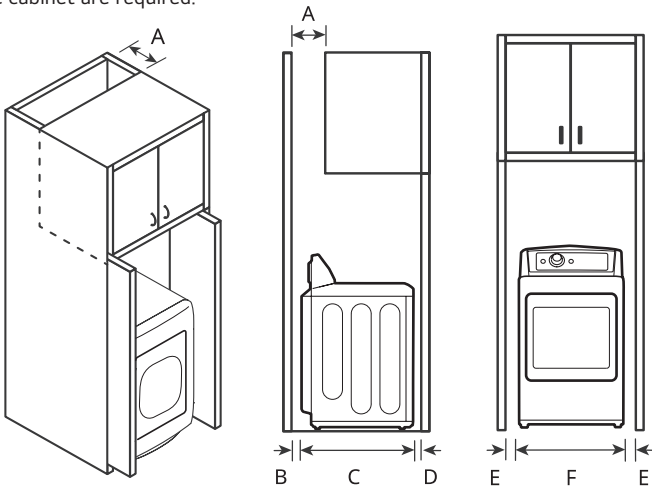


DIMENSIONS	
A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 1/2" (750mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)

DIMENSION / CLEARANCES

Installation Spacing for Recessed Area or Closet Installation

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

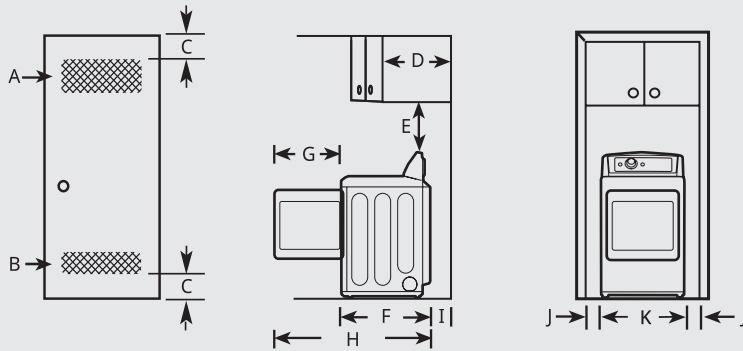

DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm ²)
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm ²)
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Depth	29 1/2" (750 mm)
G Length of Door Swing	21 1/4" (540 mm)
H Maximum Depth With Door Open	50 1/4" (1275 mm)
I Back Clearance	≥ 5" (127 mm)
J Side Clearance	≥ 1" (25 mm)
K Width	27" (686 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- Level
- Level Feet

