# Top Control Dishwasher

- FlushFit™ Design
- AutoLeak Detection
- Auto Open Dry
- 6 Wash Cycles & 5 Options
- LoDecibel® Quiet Operation (52 dBA)
- Stainless Steel Tub
- Easy Installation



| COLOR AVAILABILITY |
|---|
| LDWBC22BT – Stainless Steel |

| CAPACITY | |
|---|---|
| Total Place Settings | 14 |
| Upper Rack Dish Height Limit | 9 7/8" |
| Lower Rack Dish Height Limit | 11 5/8" |

| RACKS AND BASKETS | |
|---|---|
| Cutlery Baskets | Yes |
| Cup Rack | 3 |
| Stemware Holder | Yes |
| Fold Down Tines | No |
| BPA-Free Nylon Coated Racks and Tines | Yes |
| Rack Handle | No |
| Upper Rack Pull-Out Mechanism | N/A |
| Lower Rack Pull-Out Mechanism | N/A |
| EasyRack Plus® System | No |
| Height Adjustable Upper Rack | No |
| 3rd Rack | No |

| STYLE AND DESIGN | |
|---|---|
| FlushFit™ | Yes |
| Control Panel Location | Top Control |
| Electronic Controls | Fully Integrated Control Panel |
| Status Indicators | LED Light in Front Door |
| Time Remaining Indicator | No |
| Tub Material | Stainless Steel |
| Tub Light | No |
| Handle | Pocket |
| Fingerprint & Smudge Resistant Exterior | Yes |
| ADA Compliant | No |

| FEATURES | |
|---|---|
| TrueSteam® | No |
| QuadWash® | No |
| BlastZone™ | No |
| Inverter Direct Drive Motor | No |
| LoDecibel™ Quiet Operation | 52 dBA |
| Number of Wash Cycles | 6 (Auto, Heavy, Normal, Turbo, Rinse, Tub Clean) |
| Number of Options | 5 (Delay Start, Sanitize (Sani Rinse), High Temp, Dry (Air / Heat), Control Lock (Lock / Unlock) |
| Number of Spray Arms | 3 (Top, Middle, Lower) |
| SenseClean™ Wash System | Yes |
| 1 Hour Wash and Dry | No |
| Vario Wash | No |
| Detergent and Rinse-Aid Dispenser | Yes |
| Drying System | Auto Open |
| End of Cycle Indicator | Yes (Beeper) |
| Rinse Aid Indicator | Yes |
| Hidden Water Heater | Yes |
| AutoLeak Detection | Yes |
| Safety Float Switch (Leaks) | Yes |
| Soil (Turbidity) Sensor | Yes |
| Temperature Sensor | Yes |
| Balanced Door | Yes |
| 3-Stage Filtration System | No |
| NSF®-Certified | No |


| SMART FEATURES | |
|---|---|
| Wi-Fi Enabled | No |
| ThinQ® Technology | No |
| ThinQ Care™ | No |
| ThinQ Up™ | No |
| Voice Control | No |
| SmartDiagnosis™ | No |
| Remote Monitoring | No |

| TECHNICAL SPECS | |
|---|---|
| ENERGY STAR® Certified | Yes |
| CEE Qualified | No |
| Energy Consumption (kWh / Year) | 220 |
| Water Factor (WF) | 3.0 |
| Electrical Requirements | 120V, 60 Hz, 9.7 Amps |
| Power Outlet Location | Within 48" of Either Side |
| Power / Plug Type | Hardwire |
| Drain Hose Length | Within 6 ft. of Sink |
| Drain Location | Rear |
| Water Connection | 3/4" Female Garden Hose Thread |
| Water Pressure (Min.– Max.) | 2.9 psi ~ 145 psi |
| Inlet Water Temperature (Min.– Max.) | 120° – 149° F |


| DIMENSIONS / CLEARANCES / WEIGHTS | |
|---|---|
| Product Dimensions (W x H x D) | 23 7/16" x 33 11/16" x 22 11/16" |
| Adjustable Height | Min. 33 11/16" – Max. 34 7/8" |
| Depth with Door Closed, Including Handle | 22 11/16" |
| Depth with Door Open | 46 5/8" |
| Cutout Dimensions (W x H x D) | 24" x 33 7/8" x 24" |
| Approx. Weight (Product / Carton) | 70.5 lbs. / 79 lbs. |
| Carton Dimensions (W x H x D) | 26 3/8" x 34 13/16" x 26" |
| **LIMITED WARRANTY** | |
| Labor | 1 Year |
| Parts | 1 Year |
| Control Board and Rack Parts | 1 Year |
| Stainless Steel Door Liner or Tub | 1 Year |

## DIMENSIONS / CLEARANCES

### BACK VIEW

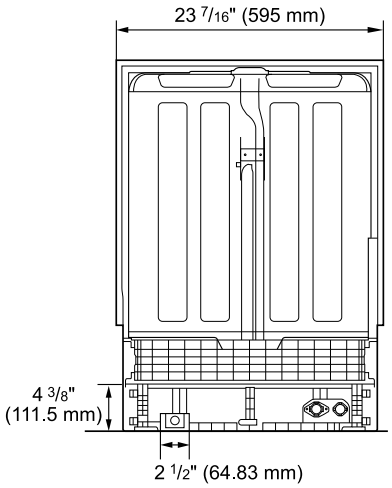


### SIDE VIEW

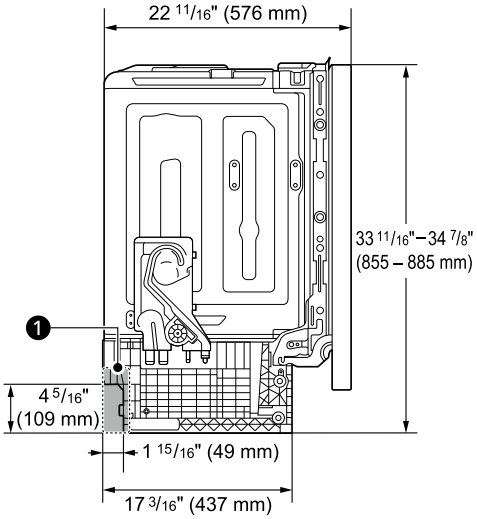



For easiest installation, see marked areas ❶ for water and electrical clearances in base of dishwasher. Water supply hose, drain hose and electric cable should be passed through this area.

DIMENSIONS / CLEARANCES

# Preparing Cabinet Opening


This dishwasher is designed to fit a standard dishwasher opening. An opening may be needed on both sides to route plumbing and electrical connections.

- To ensure proper drainage, install the dishwasher no more than 12 ft. (3.65 m) from the sink.
- The location must have sufficient space for the dishwasher door to open easily and provide at least 0.1” (2 mm) between the dishwasher and the cabinet sides.
- If installing the dishwasher in a corner, leave a minimum of 2” (50 mm) between the dishwasher and the adjacent wall.
- The adjacent wall must be free of obstructions.
- For flush installations only, you may remove the cabinet brace ❶ inside the cabinet.

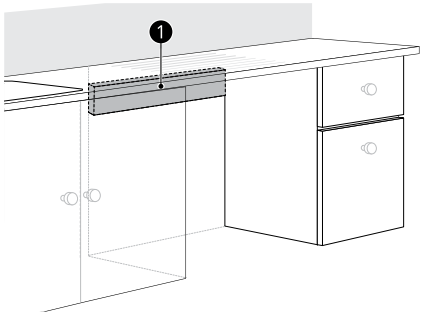



## Choosing the Proper Location

**1** Select a location as close to the sink as possible for easy connections to water supply line, drain hose and electrical connection.

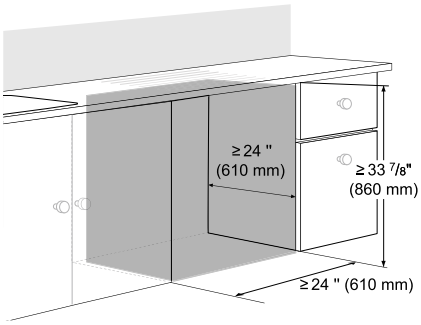


**2** To allow for proper clearance of plumbing and electrical, use the template included with the literature to determine the clearance on the side of the cabinet where the cabinet meets the back wall. Using a 2 1/2” diameter hole saw, drill a hole in the target area as shown.




LG Business Solutions

© 2026 LG Electronics USA, Inc. All rights reserved. “LG Life’s Good” is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice.