

SPEED QUEEN® ON-PREMISES LAUNDRY SOLUTIONS

Single Tumble Dryer

ST075


75 lb (34 kg)

Tumble Dryers

Our single pocket tumble dryers are designed with fewer moving parts, so that you'll face fewer maintenance problems and less wear and tear. We make it easier with a large, easy-to-clean lint compartment and a heavy-duty door hinge designed to withstand heavy usage.

- High-performance heater box increases energy efficiency, reduces drying times and provides a more comfortable operating environment.
- Precise drying performance with OPT (over-dry prevention technology).

- Large easy-to-clean lint compartment.
- Reversing option available.
- Quantum™ gives you complete laundry control to reduce costs and increase throughput.

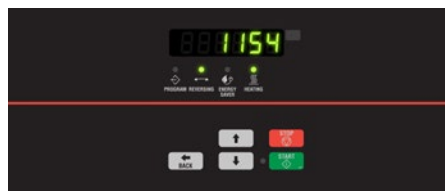

Quantum® Control

Revolutionary Quantum® technology combines equipment controls, programming and wireless networking into one complete OPL management system, giving you total control over your laundry room from any computer, anywhere in the world. Advanced diagnostics and audit data reports help you catch errors before they become bigger issues. Quantum is designed to help you reduce costs, decrease your downtime and increase your throughput.




Dual Digital Control

With features that include one-touch cycle repeat, automatic extended tumble and large digital countdown display, it's simple to set your drying time, temperature and cool down on the fly.

Single Tumble Dryer

Specifications

ST075		
Control Option	Quantum, Dual Digital	
Capacity - lb (kg)	75 (34)	
Overall Width - in (mm)	38.5 (980)	
Overall Depth - in (mm)	Standard	53.0 (1350)
	ProCapture	53.0 (1350)
Overall Height - in (mm)	77.3 (1960)	
Cylinder Diameter - in (mm)	37.0 (940)	
Cylinder Depth - in (mm)	36.0 (914)	
Cylinder Volume - cu. ft (liters)	22.4 (634)	
Door Opening Size - in (mm)	26.9 (683)	
Heat Input Power	Gas	Standard - 165,000 Btu/hr ProCapture - 150,000 Btu/hr
	Steam	153,985 Btu/hr
	Electric	36kW
Gas Connections* - in (npt)	0.5	
Plumbing Connections - Steam - in (npt)	0.75	
Air Outlet - in (mm)	Standard	8 (200)
	ProCapture	10 (254)
Motor - HP	Fan	0.5
	ProCapture™ Fan	1.5
	Cylinder	0.5
Airflow - cfm	800 (380)	
Electrical Specs - amps	Gas & Steam	
	B	100-120V/50/60/1 12
	X	200-240V/50/60/1/3 Standard - 7 ProCapture - 19
	N	440-480V/50/60/3 3
	Q	200-240/50-60/3 ProCapture - 14**
	Electric	
	G	230-240V/50/60/3 90
	L	460-480V/50/60/3 45
Shipping Dimensions Approx. - in (mm)	Width	41.5 (1054)
	Depth	56.0 (1420)
	Height	Gas & Electric - 81.0 (2060) Steam - 83.5 (2120)
Net Weight - lb (kg)	Gas & Steam	715 (324), 740 (335)
	Electric	730 (330)
	ProCapture	740 (335)
Shipping Weight - lb (kg)	Gas & Steam	760 (345), 800 (365)
	Electric	780 (355)
	ProCapture	790 (360)
Agency Approvals	UL	

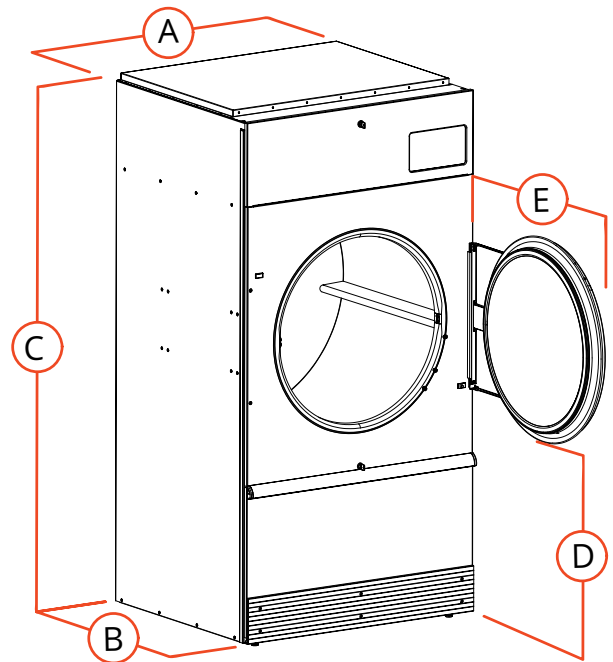

A.	Overall Width - in (mm)	38.5 (980)
B.	Overall Depth - in (mm)	53.0 (1350)
C.	Overall Height - in (mm)	77.3 (1960)
D.	Door Bottom to Floor - in (mm)	29.2 (740)
E.	Door Swing - in (mm)	33.9 (860)

* LP gas available for 75 lb capacity only. Field conversion kits available for other capacities.

** ST075 with ProCapture™ only

ProCapture is not available with the Dual Digital control.

Tumble dryer models are made to suit a variety of electrical service characteristics. See your Speed Queen distributor for specifications.

For further details on installation, refer to Installation, Operation and Maintenance instructions supplied with the tumble dryer. Amperage ratings available in Installation Manual.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.