HOME SOLUTIONS - LAUNDRY

# DLE6480W/ DLG6481W

## 7.3 cu. ft. Rear Control Top Load Dryer

KEY FEATURES

- 7.3 cu. ft. Ultra Large Capacity
- LoDecibel® Quiet Operation
- Built-In Intelligence: AI Sensor Dry™ / Smart Pairing™
- FlowSense® Duct Clogging & Lint Filter Indicators
- Aluminized Alloy Steel Drum
- LG ThinQ® Smart Technology
- Wrinkle Care Option
- Reversible Door



AVAILABLE COLORS

ALPINE WHITE

ENERGY STAR

SMART APPLIANCE

LG ThinQ®

works with the Google Assistant

WORKS WITH alexa

**Enjoy new ways to control your home with LG smart appliances**

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle

PRODUCT FEATURES

| SUMMARY | |
|---|---|
| Type | Rear Control Top Load Dryer |
| Vent Type | Vented |
| Dryer Type | Electric / Gas |
| Capacity | 7.3 cu. ft. |
| Matching Washer | WT6485CW |
| Sensor Dry | Yes |
| Steam | No |
| Colors | White (W) |
| **DRYER PROGRAMS** | |
| No. of Programs | 10 |
| | Normal, Heavy Duty, Bedding, Delicates, Perm Press, AI Dry, Quick Dry, Timed Dry Air Dry, Downloaded |
| No. of Options | 9 |
| | Wrinkle Care, Control Lock, More Time, Less Time, Damp Dry Signal, Energy Saver, Signal, Remote Start, Wi-Fi |
| Temperature Setting | High, Medium, Low |
| Drying Levels | Very Dry, Normal Dry, Damp Dry |
| Manual Dry Times | 10-100 min (5min Increments) |
| **APPEARANCE** | |
| Control & Display | Electronic Control Panel with LED Display |
| Dial-A-Cycle® | Yes |
| EasyLoad® Door | No |

| FABRIC CARE FEATURES | |
|---|---|
| Sensor Dry | Yes |
| Precise Temperature Control with Variable Heater | Yes |
| Steam | No |
| **CONVENIENCE FEATURES** | |
| 3 Minute Installation Check | Yes |
| LoDecibel® Quiet Operation | Yes |
| End of Cycle Signal | Yes |
| Drum Light (door open) | No |
| Reversible Door | Yes |
| FlowSense® Duct Clogging Indicator | Yes |
| Wrinkle Care Option | Yes |
| Control Lock | Yes |
| Venting Option | Electric: 4 Way Venting<br>Gas: 3 Way Venting |
| 4 Adjustable Legs | Yes |
| Remaining Time Display/Status Indicator(s) | Yes |
| **SMART FEATURES (ThinQ® TECHNOLOGY)** | |
| Smart Diagnosis (v3.0) | Yes |
| Wi-Fi | Yes |
| NFC Tag On Technology | No |
| ThinQ Care (Remote Start/Cycle Monitor) Specialty Dryers tab | Yes |
| Remote Start/Cycle Monitor | Yes |
| **ENERGY** | |
| ENERGY STAR® Certified | Yes |
| CEF | Electric: 3.94<br>Gas: 3.49 |


| MATERIALS | |
|---|---|
| Aluminized Alloy Steel Drum | Yes |
| NeveRust® Stainless Steel Drum | No |
| Drum Rear | Painted |
| Cabinet | Painted Steel |
| Door/ Trim | Solid/ White |
| All Available Colors | White (W)<br>Onyx Black (X) |
| **POWER SOURCE** | |
| Ratings | CSA Listed |
| Electrical Requirements | Electric: 240V, 26Amps<br>Gas: 120V, 60Hz, 5 Amps |
| Type | Electric, Gas |
| BTU Rating | Electric: N/A<br>Gas: 20,000 |
| **OPTIONS** | |
| LP Conversion Kit | Electric: N/A<br>Gas: 383EEL3002R |
| Side Venting Kit | 383EEL9001B |
| **DIMENSIONS** | |
| Product (WxHxD) | 27" x 44 1/2" x 29 1/2"<br>(50 1/4" D with door open) |
| Carton (WxHxD) | 29" x 46 1/2" x 31 3/8" |
| Product Weight | Electric: 100 lbs<br>Gas: 104 lbs |
| Carton Weight | Electirc: 107 lbs<br>Gas: 111 lbs |
| **LIMITED WARRANTY** | |
| Parts & Labor | 1 Year |
| Drum | 3 Years |
| Inverter Compressor & Motor | 10 Years |
| **UPC CODES** | |
| DLE6480W | 195174157114 |
| DLG6381W | 195174157695 |

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 8/10/26

# DLE6480W/ DLG6481W

## DIMENSION / CLEARANCES

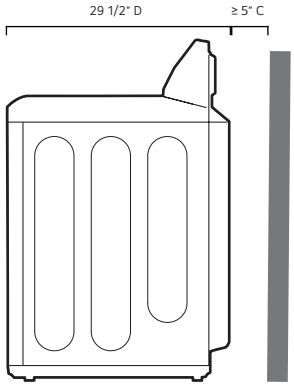



| DIMENSIONS | |
|---|---|
| Product (WxHxD) | 27" x 44 1/2" x 29 1/2"<br>(50 1/4" D with door open) |
| Carton (WxHxD) | 29" x 46 1/2" x 31 3/8" |
| Weight (Product) | Electric: 100 lbs / Gas: 104 lbs |
| Weight (Carton) | Electirc: 107 lbs / Gas: 111 lbs |

## INSTALLATION SPACING for CABINET

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

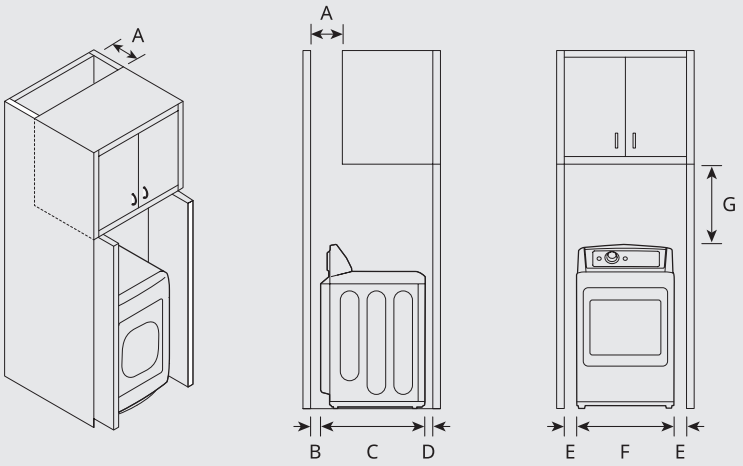


| DIMENSIONS | | |
|---|---|---|
| A | Depth of Ventilation Opening | ≥ 7" (178 mm) |
| B | Back Clearance | ≥ 5" (127 mm) |
| C | Depth | 29 5/8" (754 mm) |
| D | Front Clearance | ≥ 1" (25mm) |
| E | Side Clearance | ≥ 1" (25 mm) |
| F | Width | 27" (700 mm) |

## DIMENSION / CLEARANCES


### CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm2) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm2) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

## DIMENSION / CLEARANCES

### INSTALLATION SPACING FOR CABINET

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

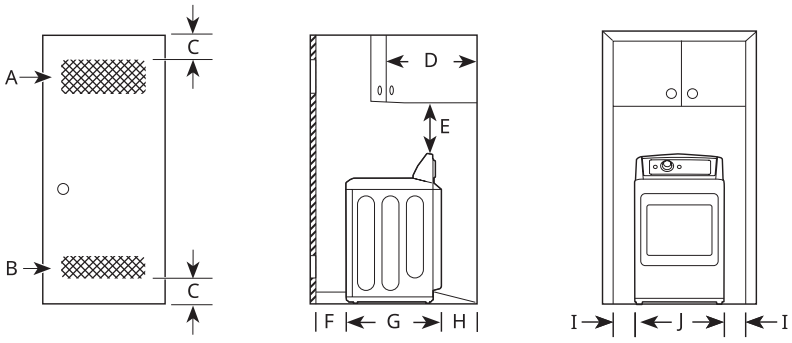



| DIMENSIONS | | |
|---|---|---|
| A | Upper Ventilation Opening | ≥ 48 sq. in. (310 cm2) |
| B | Lower Ventilation Opening | ≥ 24 sq. in. (155 cm2) |
| C | Distance to Ventilation Opening | ≥ 3" (76 mm) |
| D | Overhead Cabinet Depth | ≤ 14" (356 mm) |
| E | Distance to the Overhead Cabinet/Shelf | ≥ 18" (457 mm) |
| F | Depth | 28 7/8" (734 mm) |
| G | Length of Door Swing | 22 1/4" (564 mm) |
| H | Maximum Depth with Door Open | 51 1/8" (1298 mm) |
| I | Back Clearance | ≥ 5" (127 mm) |
| J | Side Clearance | ≥ 1" (25 mm) |
| K | Width | 27" (686 mm) |

## LEVELING THE APPLIANCE

### CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

1. Level
2. Level Feet

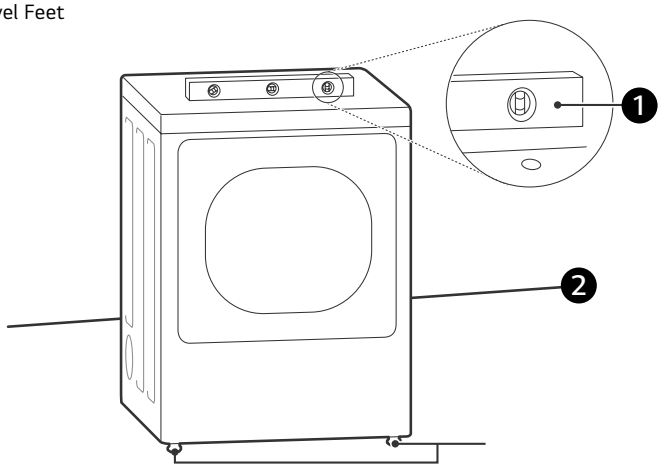


© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 8/4/26