

LRFLC2716_

French Door Refrigerator

- Counter-Depth MAX™
26.5 cu. ft. Capacity
Internal Water Dispenser
Single Ice Maker
Cooling Care
LG ThinQ Technology (Wi-fi)
ThinQ®

AVAILABLE COLORS

- PRINTPROOF™ STAINLESS STEEL
BLACK STAINLESS STEEL
STAINLESS STEEL LOOK





Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

ThinQ Care



SUMMARY		REFRIGERATOR DOOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu.ft.)	17.8	No. of Door Bins (left door)	4	Total (WxHxD)	35 3/4" x 70 1/4" x 29 1/8"
Freezer (cu.ft.)	8.7	No. of Door Bins (right door)	4	Width	35 3/4"
Total Capacity (cu.ft.)	26.5	Door Shape	Flat	Height (Top of Hinge or Door cap Décor)	70 1/4"
ENERGY		Handle Type	Pocket	Width (Door Open 90° without Handle)	40"
ENERGY STAR® Certified	Yes	FREEZER		Case Edge Clearance (Door Fully Open)	21" (R) 9 5/8" (L) 11 3/8"
Energy Consumption (kWh/Year)	632	Door Type	Pull Drawer	Width (Door Fully Open without Handle)	56 3/4"
ICE & WATER SYSTEM		Handle Type	Pocket Handle	Door Edge Clearance without Handle	2 1/4"
Dispenser	Internal Water Only	Drawers / Shelves	2-Tier Organization	Height to Top of Case	68 7/8"
No. Freezer Ice Maker	1	Freezer Light Upper	LED Lighting	Height (Floor to Top of Freezer Door)	27 7/8"
Freezer Ice Type	Cubed	DISPLAY		Depth without Door	24 3/4"
Freezer Daily Ice Production	2.5 / 2.7 (Ice Plus) lbs.	Display Type	Smooth Touch Control / White LED	Depth without Handles	29 2/8"
Freezer Ice Storage Capacity	4.0 lbs	Temperature Control	Electronic/ Digital	Depth (to Hinge Cover)	18 1/4"
Ice Plus	Yes	Door Alarm	Yes	Depth (Total with Door Open)	43 5/8"
Filtration System	1 Stage	Child Lock	Yes	Depth (Draw Open Fully without Handle)	48 7/8"
Filter	LT1000P	Smart Diagnosis	Yes	Installation Clearance	Sides 1/8", Top 1", Back 2"
COOLING		Auto Closing Door Hinge	Yes	Carton Dimensions (WxHxD)	38" x 73" x 32"
Compressor Type	Smart Inverter Compressor	Wi-Fi Enabled	Yes	Weight (Unit/Carton)	249 lbs / 271 lbs
Refrigerant	R600a / 78g / 2.75oz	ThinQ®	Yes	LIMITED WARRANTY	
Evaporator	1	ThinQ® Care	Yes	Parts & Labor	1 Year
Multi Air Flow Cooling	Yes	Sabbath Mode	Yes	Sealed System (Parts & Labor)	5 Years
Temperature Sensors	2	ADA Compliant	Yes	Compressor (Parts & Labor)	5 Years
REFRIGERATOR		MATERIALS & FINISH		Linear Inverter Compressor (Parts only)	6-10 Years
No. of Shelves	4 Split (4 Fixed)	Hidden Hinges	Yes	UPC CODES	
Shelf Construction	Spill Protector Tempered Glass	All Available Colors	PrintProof™ Stainless Steel Black Stainless Steel	LRFLC2716S	195174111697
Shelf Trim	White décor	Insulation	Low GWP and Zero ODP Blowing Agent	LRFLC2716D	195174132661
No. of Crisper Bins	2			LRFLC2716V	195174157633
Pantry (Glide N Serve)	Yes (Normal)				
Cool Guard	Yes				
Light	Yes				
Fresh Air Filter	Yes				
Light	Yes				

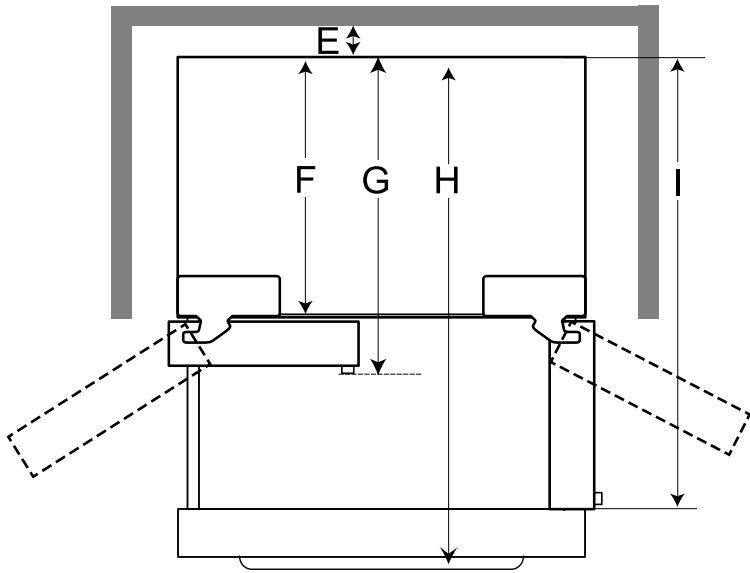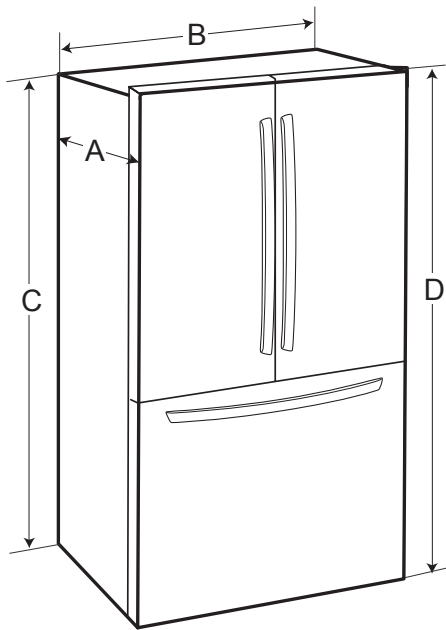

DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

DIMENSIONS		
A	Depth without Handle	29 1/8" (739 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/4" (628mm)
G	Depth with Handle	N/A
H	Depth (Total with Freezer Drawer Open)	48 7/8" (1239 mm)
I	Depth (Total with Door Open 90°)	43 5/8" (1106mm)

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or sideto side. If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1. Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
2. Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE
• A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

