

FISHER & PAYKEL

**DATA SHEET**
**48" Professional Gas Cooktop**

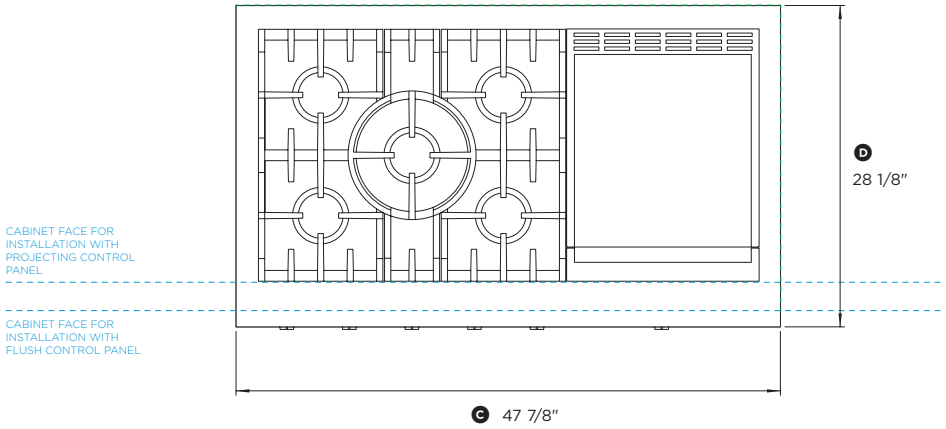



PLAN VIEW

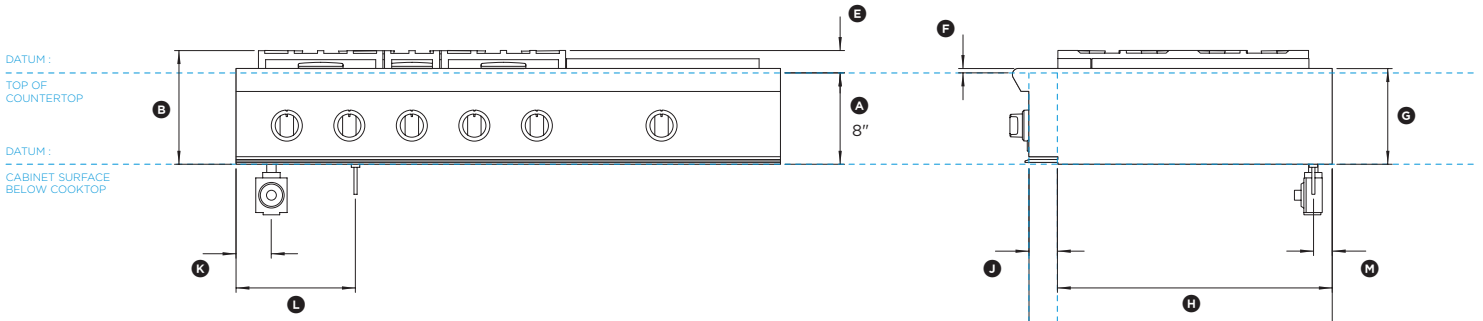


FRONT VIEW

PROFILE VIEW




Model no:
**CPV2-485**
(refer page 3 for metric measurements)

| **Product Dimensions** | **in** |
|---|---|
| Ⓐ Height below countertop datum to bottom of chassis | 8" |
| Ⓑ Overall height of product (bottom of chassis to top of grates) | 9 15/16" |
| Ⓒ Overall width of cooktop | 47 7/8" |
| Ⓓ Overall depth of cooktop | 28 1/8" |
| Ⓔ Height above countertop datum to top of grates | 1 15/16" |
| Ⓕ Height from countertop datum to chassis top surface | 3/8" |
| Ⓖ Height of chassis | 8 3/8" |
| Ⓗ Depth from rear of chassis to cabinetry datum – projecting | 24 3/16" |
| Ⓘ Depth from rear of chassis to cabinetry datum – flush | 26 11/16" |
| Ⓙ Depth of control panel | 2 1/2" |
| Ⓚ Distance from left edge of chassis to center line of gas inlet | 3" |
| Ⓛ Distance from left edge of chassis to center line of power cord | 10 1/2" |
| Ⓜ Distance from rear edge of chassis to center line of gas/power | 1 5/8" |

| **Cutout Dimensions** | **in** |
|---|---|
| Overall height of cutout | 8" |
| Overall width of cutout | min 48" |
| Overall depth of cutout for projecting control panel<br>Overall depth of cutout for flush control panel | max 24 3/16"<br>max 26 11/16" |

INDICATES CABINETRY DATUM ----------
INDICATES CUTOUT ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

**DATA SHEET**
**48″ Professional Gas Cooktop**

Model no:
**CPV2-485**
(refer page 4 for metric measurements)

| Cabinetry Dimensions | in |
|---|---|
| Ⓐ Minimum width of ventilation hood installed above cooktop – not shown* | 48″ |
| Ⓑ Minimum vertical distance between countertop and cabinet extending above counter | 18″ |
| Ⓒ Minimum clearance from left and right edge of range to nearest vertical combustible surface | 12″ |
| Ⓓ Minimum clearance from cooking surface to: | |
| – combustible surface centered above the cooking surface | 54″ |
| – combustible covering for ventilation hood centered above the cooking surface | 36″ |
| – non-combustible surface centered above the cooking surface | 30″ |
| Ⓔ Maximum overall depth of overhead cabinetry | 13″ |

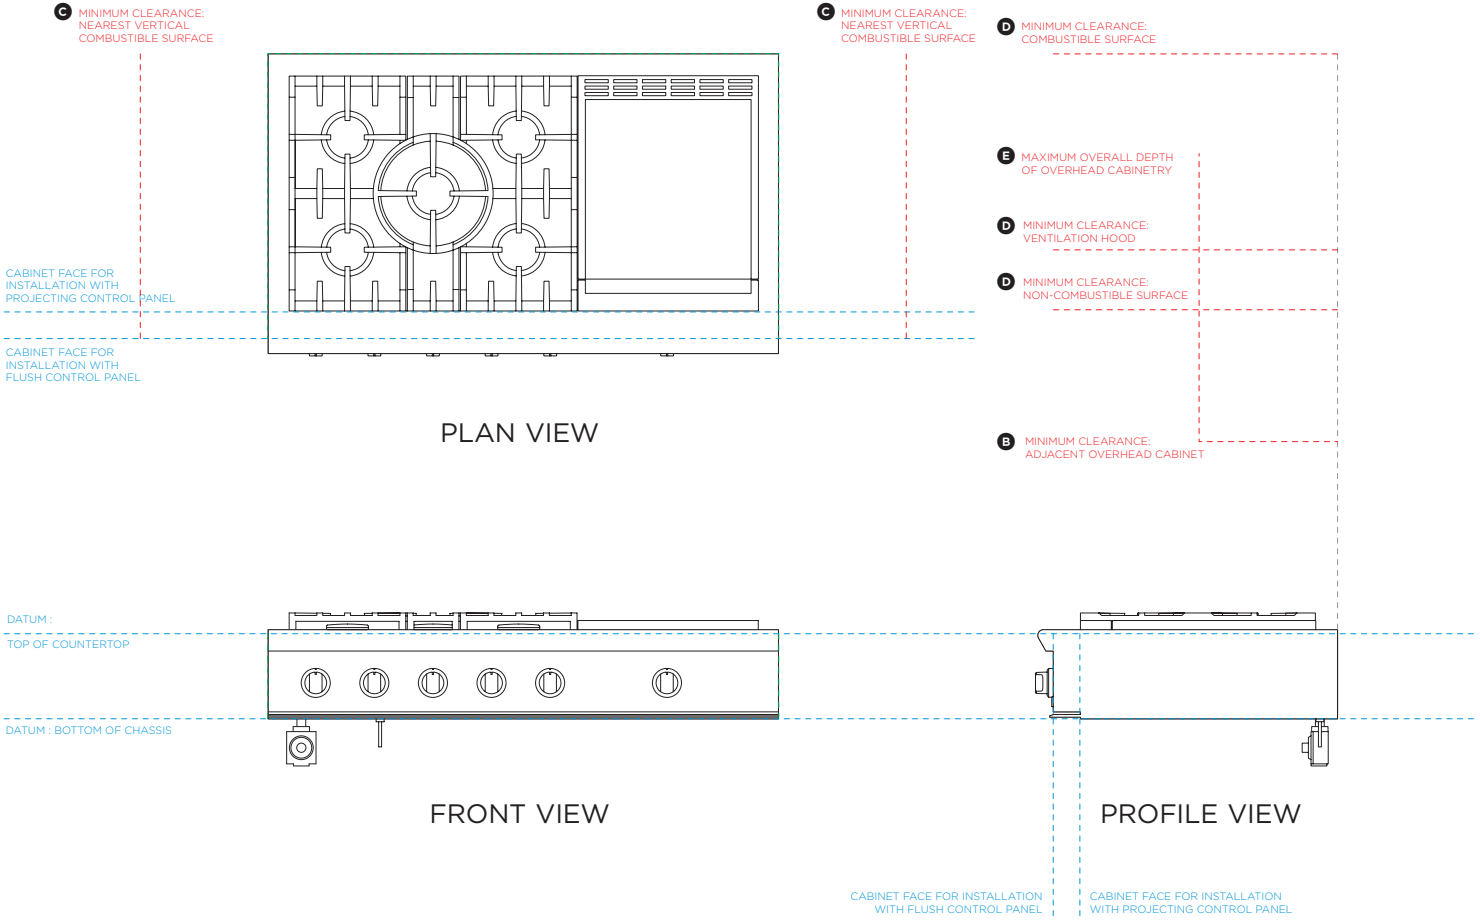



INDICATES CABINETRY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16″). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

**DATA SHEET**
**48" Professional Gas Cooktop**

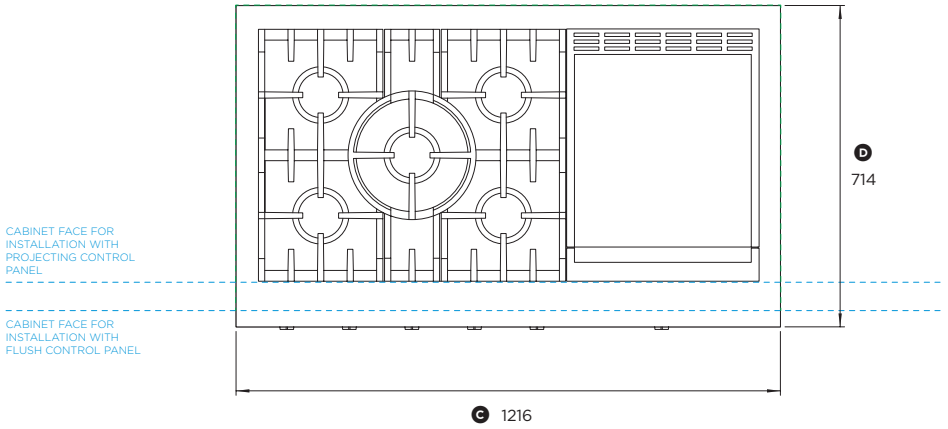


PLAN VIEW

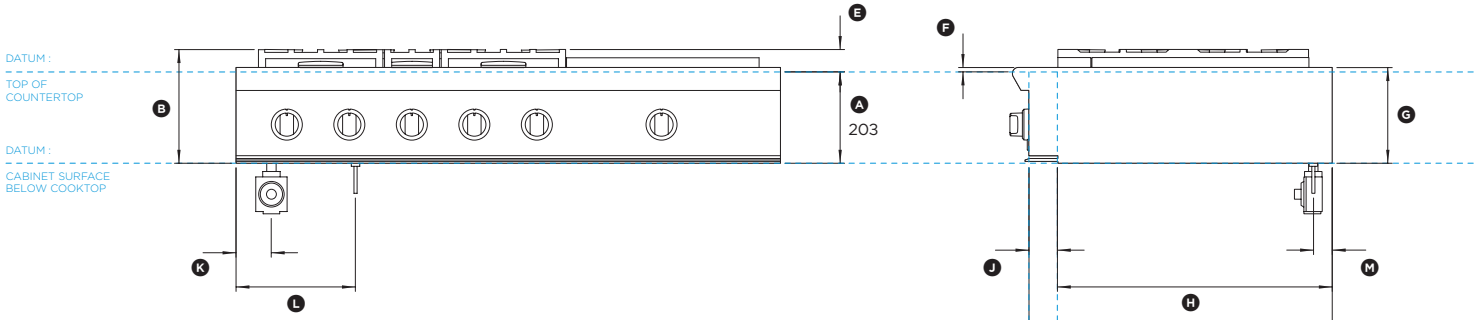


FRONT VIEW

PROFILE VIEW

CABINET FACE FOR INSTALLATION WITH FLUSH CONTROL PANEL

CABINET FACE FOR INSTALLATION WITH PROJECTING CONTROL PANEL

0 100 200 400
millimetres

Model no:
**CPV2-485**
(refer page 1 for imperial measurements)

| **Product Dimensions** | **mm** |
|---|---|
| Ⓐ Height below countertop datum to bottom of chassis | 203 |
| Ⓑ Overall height of product (bottom of chassis to top of grates) | 253 |
| Ⓒ Overall width of cooktop | 1216 |
| Ⓓ Overall depth of cooktop | 714 |
| Ⓔ Height above countertop datum to top of grates | 50 |
| Ⓕ Height from countertop datum to chassis top surface | 10 |
| Ⓖ Height of chassis | 213 |
| Ⓗ Depth from rear of chassis to cabinetry datum – projecting | 614 |
| Ⓘ Depth from rear of chassis to cabinetry datum – flush | 677 |
| Ⓙ Depth of control panel | 64 |
| Ⓚ Distance from left edge of chassis to centre line of gas inlet | 77 |
| Ⓛ Distance from left edge of chassis to centre line of power cord | 267 |
| Ⓜ Distance from rear edge of chassis to centre line of gas/power | 42 |

| **Cutout Dimensions** | **mm** |
|---|---|
| Overall height of cutout | 203 |
| Overall width of cutout | min 1219 |
| Overall depth of cutout for projecting control panel | max 614 |
| Overall depth of cutout for flush control panel | max 678 |

INDICATES CABINETRY DATUM ----------
INDICATES CUTOUT ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

**DATA SHEET**
**48" Professional Gas Cooktop**

Model no:
**CPV2-485**
(refer page 2 for imperial measurements)

| **Cabinetry Dimensions** | **mm** |
|---|---|
| Ⓐ Minimum width of ventilation hood installed above cooktop – not shown* | 1219 |
| Ⓑ Minimum vertical distance between countertop and cabinet extending above counter | 457 |
| Ⓒ Minimum clearance from left and right edge of range to nearest vertical combustible surface | 305 |
| Ⓓ Minimum clearance from cooking surface to:<br>– combustible surface centered above the cooking surface<br>– combustible covering for ventilation hood centered above the cooking surface<br>– non-combustible surface centered above the cooking surface | <br>54"<br>36"<br>30" |
| Ⓔ Maximum overall depth of overhead cabinetry | 330 |

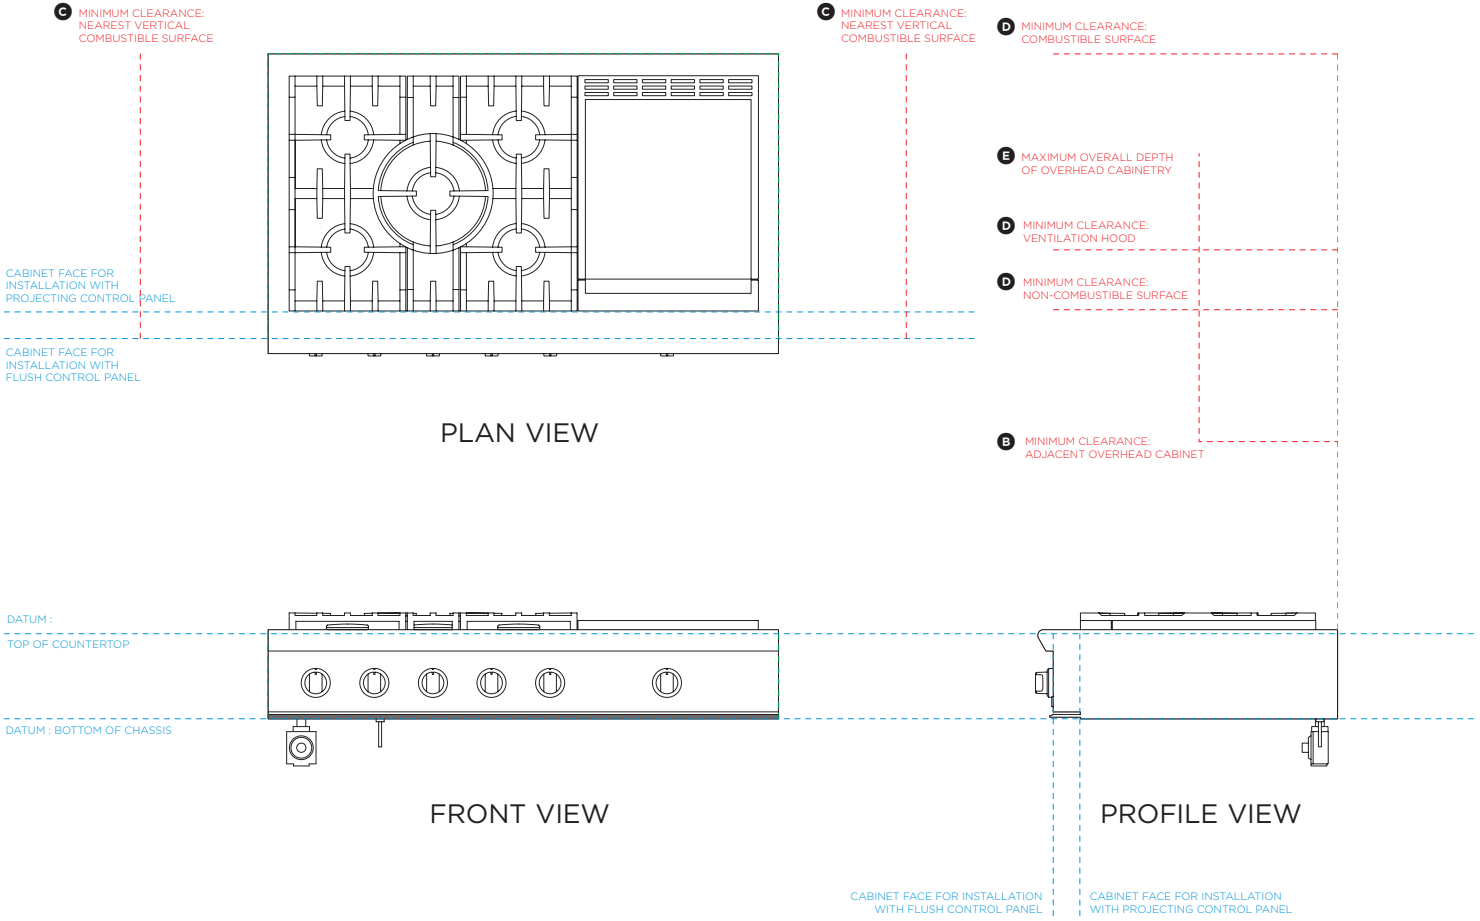


INDICATES CABINETRY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

0 100 200 400
millimetres

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com