9610-K10, 9610-K30
9610-K50, 9610-K80, & 9610-K90
Air Switch for Waste Disposal
Installation Instructions


CALIFORNIA FAUCETS RECOMMENDS THAT ALL PLUMBING & ELECTRICAL PRODUCTS BE INSTALLED BY A LICENSED PROFESSIONAL

IMPORTANT: Read all instructions prior to installation and provide copy of instructions to consumer.
Operating Specifications:
Recommended Electrical Supply Outlet Rating: 120V AC @ 15A Min. †
Controller Outlet Output Rating: 120V AC @ 13A (non-inductive) or 1/2 HP (.373 kW) @ 120V AC
† Local codes and ordinances may require a GROUND-FAULT CURRENT INTERRUPTER (GFCI) type.

1 INSTALLING TO SINK/DECK/CABINET

IMPORTANT: Determine location of AIR SWITCH **(1)**. Unit may be mounted on sink, deck or cabinet face. The recommended sink/deck/cabinet through-hole shall be Ø1-1/4"[32mm]. Maximum sink/deck/cabinet thickness should no greater than 2-3/8"[30mm]

- Place AIR SWITCH **(1)** though sink/deck/cabinet hole
- From underside or backside slide WASHER **(2)** and NUT **(3)** onto SHANK **(1a)**; securely tighten NUT **(3)**

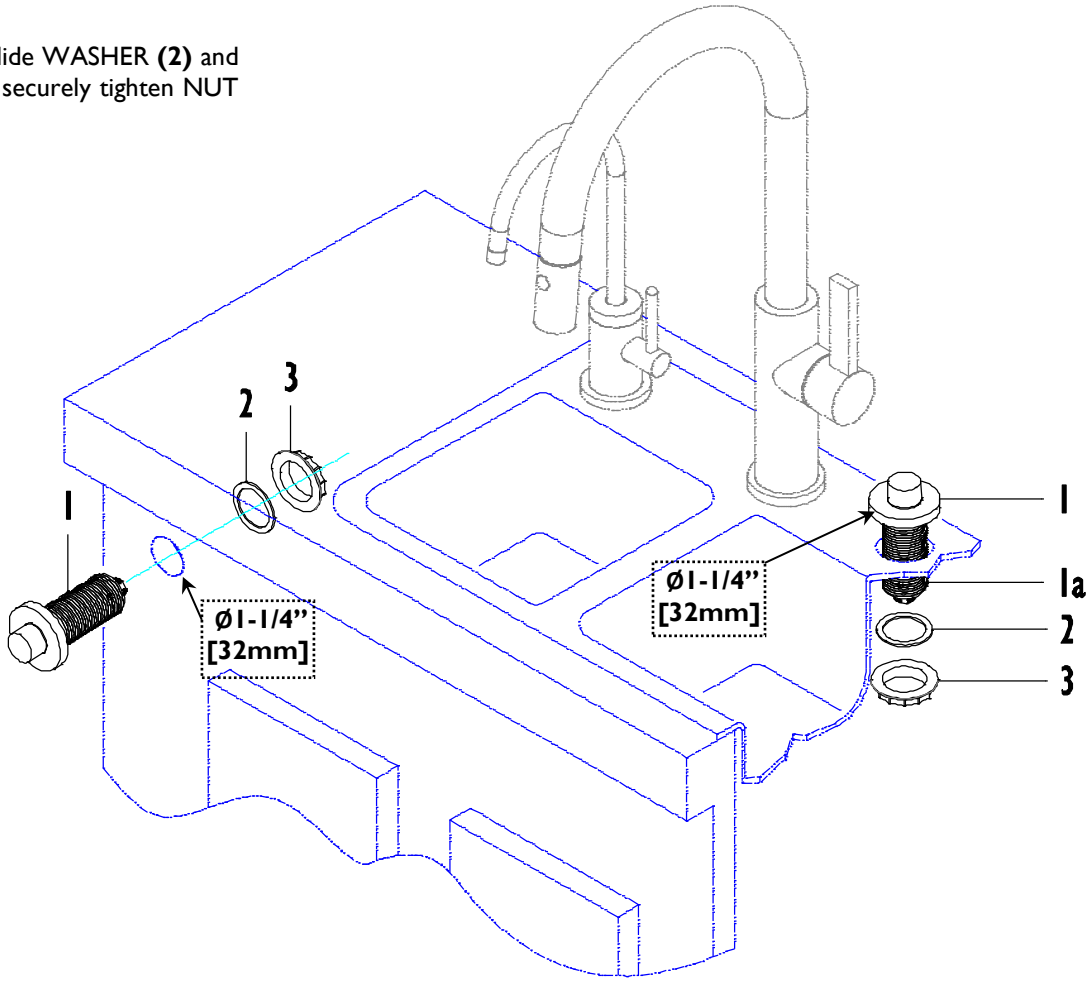

2 MOUNTING CONTROLLER

IMPORTANT: Determine location of CONTROLLER **(4)**. The location should be near the electrical OUTLET **(7)** and DISPOSAL CORD **(8a)**

- Mount CONTROLLER **(4)** to side or back wall under sink with two SCREWS **(5)** (not supplied)
- Slide TUBE **(6)** onto air switch OUTLET **(1d)** and the other end to controller INLET **(4a)**
- Insert CONTROLLER CORD **(4b)** into three-prong grounded RECEPTACLE **(7)**


NOTE: Three-prong grounded receptacle shall be in accordance with all local electrical codes and ordinances

NOTE: Some local codes may require a GFCI-protected receptacle

WARNING: When DISPOSAL CORD **(8a)** is plugged into CONTROLLER OUTLET **(4c)** the DISPOSAL **(8)** may turn on; to turn off DISPOSAL **(8)** press AIR SWITCH **(1)**

- Insert DISPOSAL CORD **(8a)** into one of the two CONTROLLER OUTLET **(4c)**

NOTE: The other CONTROLLER OUTLET **(4d)** may be used for other device (e.g. instant hot water tank); DO NOT use for dishwasher as this outlet switches OFF when DISPOSAL **(8)** is in use

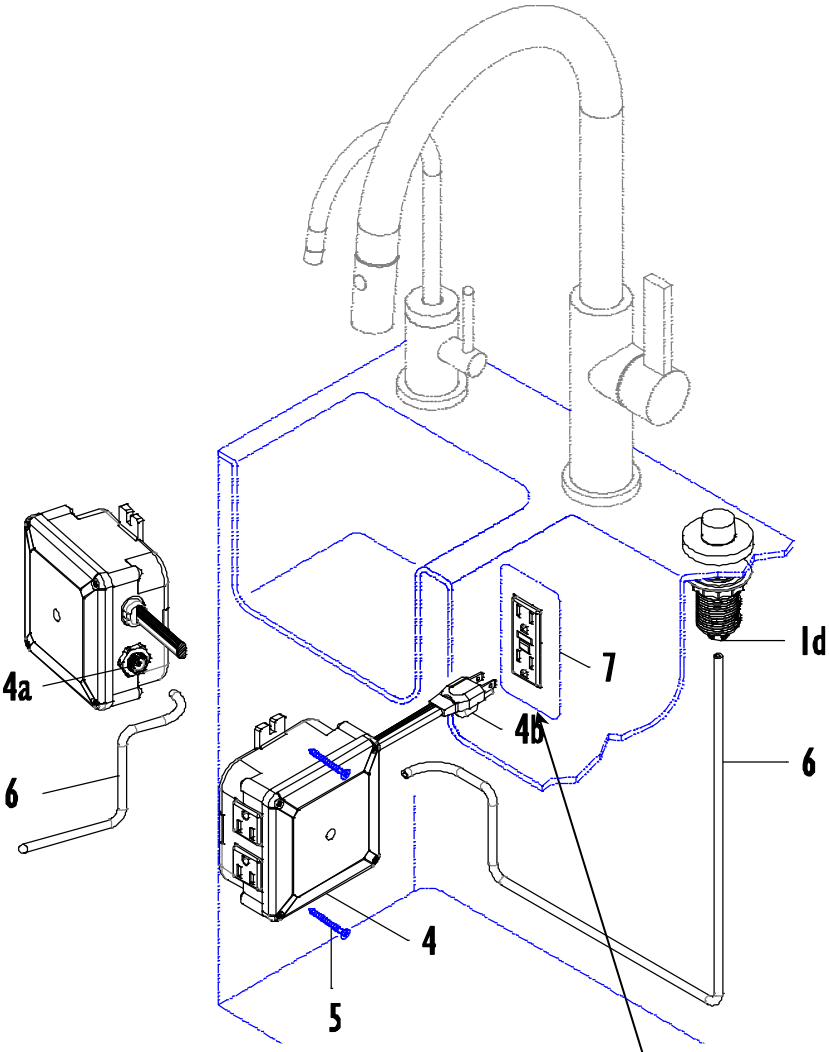

THREE-PRONG GROUNDED RECEPTACLE 15A MIN
Follow all local electrical codes & ordinances as some may require GFCI-protected receptacle

