


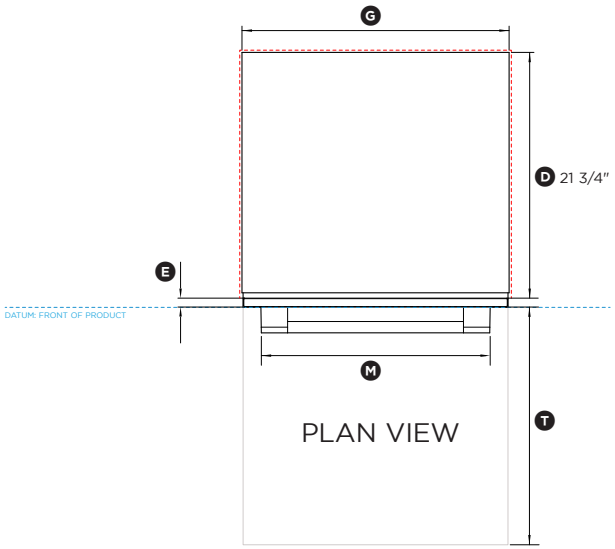


PLAN VIEW

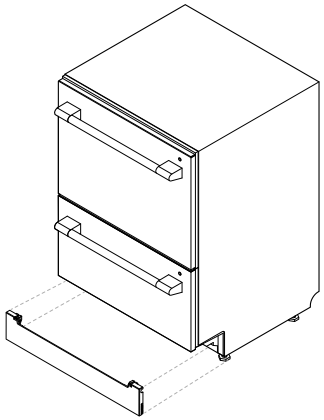


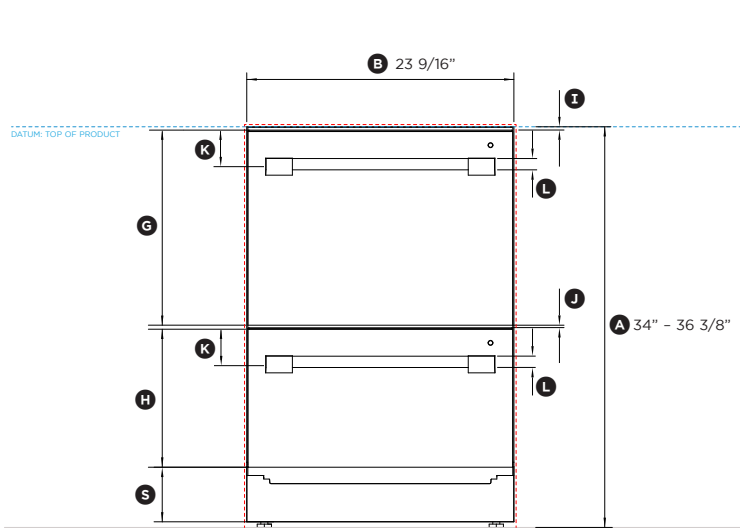

FRONT VIEW

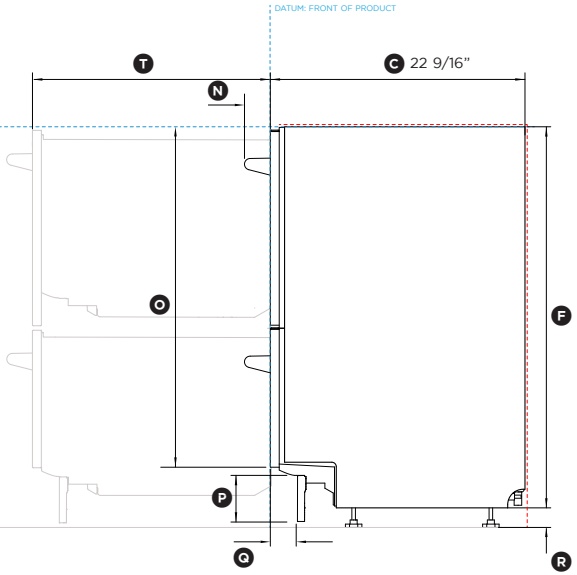

PROFILE VIEW



FISHER & PAYKEL

DATA SHEET
24" DOUBLE DISHDRAWER™ DISHWASHER

Model no:
DD24DTX6PX1
(refer page 2 for metric measurements)

Product Dimensions	**in**
(A) Overall height of product*	34" - 36 3/8"
(B) Overall width of product	23 9/16"
(C) Overall depth of product (excl. handle)	22 9/16"
(D) Depth of chassis	21 3/4"
(E) Depth of drawer front panel	13/16"
(F) Height of chassis	33 11/16"
(G) Height of upper drawer front panel	17 3/8"
(H) Height of lower drawer front panel	12 5/16"
(I) Height from top of drawer panel to top of chassis	1/4"
(J) Ventilation gap between drawer front panels	5/16"
(K) Height from top drawer panel to centre of handle rail	3 3/16"
(L) Handle thickness (not including standoffs)	1"
(M) Handle width (including standoffs)	20 1/4
(N) Handle depth measured from front of drawer	2 1/4
(O) Height from top of chassis to bottom of lower drawer panel	30 1/8"
(P) Height of toekick*	2 5/8" - 4"
(Q) Depth of toe kick recess**	2 3/8" - 3 15/16"
(R) Height of feet*	3/8" - 2 3/4"
(S) Height of toekick space**	3 15/16 - 6 5/16"
(T) Maximum extension of drawer	21 9/16"

*depending on adjustment of levelling feet
**adjustable

Minimum Clearances	**in**
Minimum inside height of cavity*	34"
Minimum inside width of cavity	23 5/8"
Minimum overall depth of cavity**	22 3/4"
Minimum clearance to adjacent cupboard door	1/16"
Minimum clearance to corner cupboard	1/2"


*depending on adjustment of levelling feet
**including 11/16" (18mm) door panels on adjacent cabinetry

Water pressure	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)
Electrical requirements	110-120 VAC max. 15A


PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------


DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

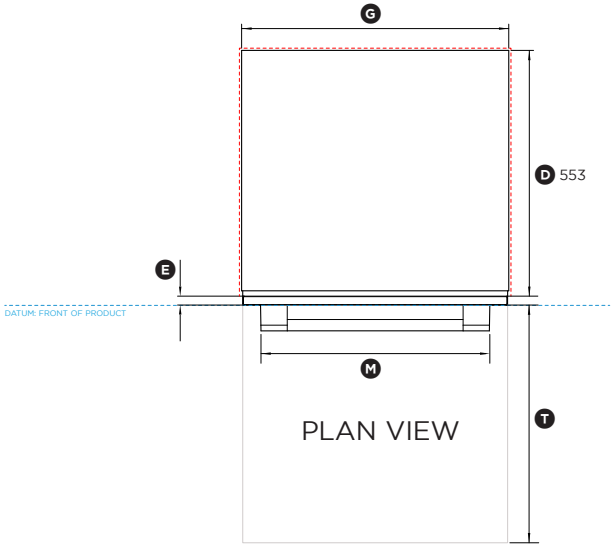

PLAN VIEW

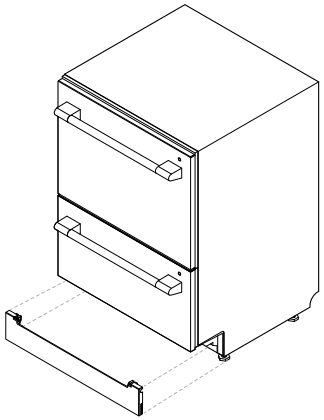

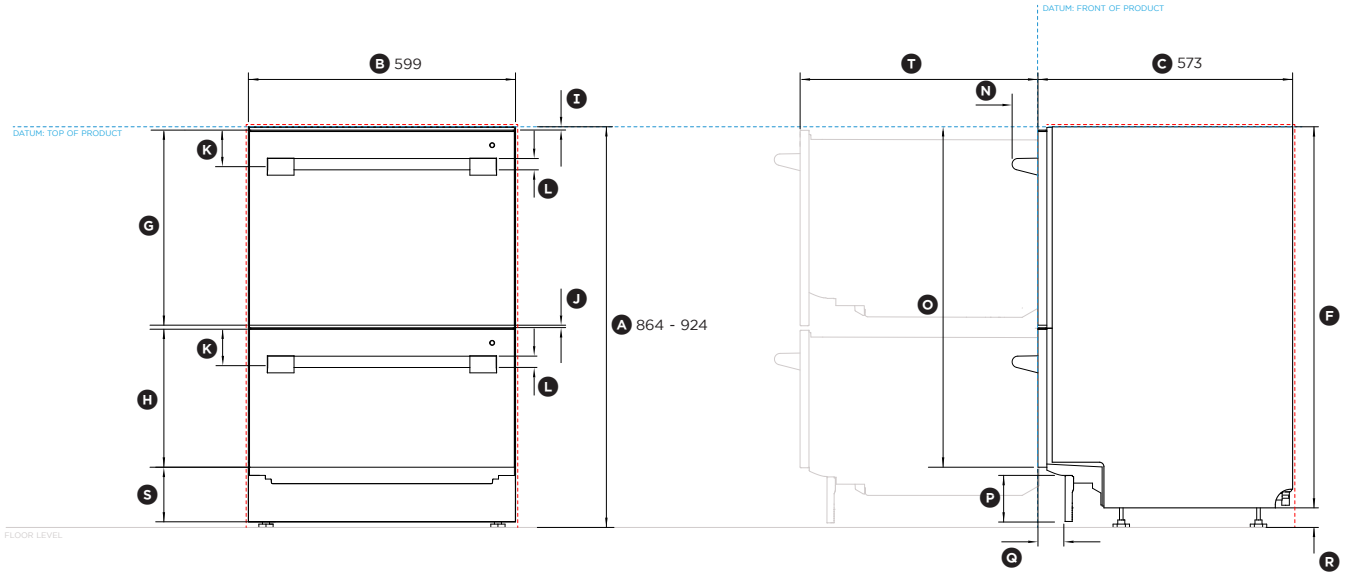

FRONT VIEW

PROFILE VIEW



FISHER & PAYKEL

DATA SHEET
24" DOUBLE DISHDRAWER™ DISHWASHER

Model no:
DD24DTX6PX1
(refer page 1 for imperial measurements)

Product Dimensions	**mm**
(A) Overall height of product*	864 - 924
(B) Overall width of product	599
(C) Overall depth of product (excl. handle)	573
(D) Depth of chassis	553
(E) Depth of drawer front panel	20
(F) Height of chassis	856
(G) Height of upper drawer front panel	442
(H) Height of lower drawer front panel	313
(I) Height from top of drawer panel to top of chassis	7
(J) Ventilation gap between drawer front panels	8
(K) Height from top drawer panel to centre of handle rail	81
(L) Handle thickness (not including standoffs)	25
(M) Handle width (including standoffs)	515
(N) Handle depth measured from front of drawer	58
(O) Height from top of chassis to bottom of lower drawer panel	765
(P) Height of toekick*	66 – 101
(Q) Depth of toe kick recess**	60 - 100
(R) Height of feet*	9 - 69
(S) Height of toekick space**	100 - 160
(T) Maximum extension of drawer	547

*depending on adjustment of levelling feet
**adjustable

Minimum Clearances	**mm**
Minimum inside height of cavity*	864
Minimum inside width of cavity	600
Minimum overall depth of cavity**	578
Minimum clearance to adjacent cupboard door	2
Minimum clearance to corner cupboard	13

*depending on adjustment of levelling feet
**including 11/16" (18mm) door panels on adjacent cabinetry

Water pressure	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)
Electrical requirements	110-120 VAC max. 15A

PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by **±**2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com