KM 7740 FR

36-inch induction cooktop, operated with its own controls

36-inch | 5 individual cooking zones



- Intuitive quick selection via number sequences – Smart Select
- Versatile – 5 cooking zones, 1 extra large with diameter of 11 in
- With a width of 36 1/8 (915) in (mm) and stainless steel frame for proud-mounting
- Shortest heating-up times – TwinBooster
- Communication with the ventilation hood – automatic Con@ctivity function

EAN: 4002516611509 / Material number: 12074220 /
Old Material Number: 26774000USA

General information	
Model number	KM 7740 FR
Manufacturer material number	12074220
EAN number	4002516611509
Marketing class	Silver
Heating type	
Fuel type	Induction
Design	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Stainless steel frame	•
Proud installation	•
Cooking zone details	
No. of rings	5
Number of cooking areas	0
Maximum number of pans	5
1st cooking zone/cooking area	
Position	front left
Type	Variable cooking zone
Size in mm	Ø 100-160
Max. Booster power rating in W	1700
Max. rating in W	1400
Max. TwinBooster power rating in W	2200
2nd cooking zone/cooking area	
Position	rear left
Type	Variable cooking zone
Size in mm	Ø 160-230
Max. Booster power rating in W	3000
Max. rating in W	2300
Max. TwinBooster power rating in W	3700
3rd cooking zone/cooking area	
Position	Centered
Type	Variable cooking zone
Size in mm	Ø 180-280
Max. Booster power rating in W	3000
Max. rating in W	2600
Max. TwinBooster power rating in W	3700
4th cooking zone/cooking area	
Position	rear right
Type	Variable cooking zone
Size in mm	Ø 140-190
Max. Booster power rating in W	2500
Max. rating in W	1850
Max. TwinBooster power rating in W	3000
5th cooking zone/cooking area	
Position	front right

KM 7740 FR

36-inch induction cooktop, operated with its own controls

36-inch | 5 individual cooking zones




EAN: 4002516611509 / Material number: 12074220 /
Old Material Number: 26774000USA

Type	Variable cooking zone
Size in mm	Ø 140-190
Max. rating in W	1850
Max. booster rating in W	2500
Max. TwinBooster rating in W	3000
User convenience	
Operation via sensor controls	SmartSelect
Miele@home	•
Automatic function	Con@ctivity 3.0
Pan and pan size recognition	•
Display colour	Yellow
Auto heat-up	•
Permanent pan recognition	•
Keeping warm	•
Stop & Go function	•
Recall function	•
Minute minder	•
Individual setting options (e.g. buzzers)	•
Smart Extras	
Push notifications	•
Recipes	•
Smart Extras	
Smart Home Integration	•
Cleaning convenience	
Easy to clean ceramic glass	•
Wipe protection	•
Safety	
Safety cut-out	•
Lock function	•
System lock	•
Integrated cooling blower	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions (width) in in. (mm)	36 1/8 (915)
Height in in. (mm)	3 1/8 (78)
Dimensions in mm (depth)	21 1/2 (544)
Cutout dimensions (width) in in. (mm)	34 1/2 in (876 mm)
Cutout dimensions (depth) in in. (mm)	20 1/2 in (518 mm)
Casing height incl. connection box in mm	2 7/8 (71)
Weight in lbs. (kg)	46 (21)
Total connected load in kW	9.90 - 11.50
Power cord length in in. (m)	3 (1.2)
Voltage in V	208 - 240
Frequency in Hz	50 - 60
Standard accessories	
Power cord	•

KM 7740 FR

36-inch induction cooktop, operated with its own controls

36-inch | 5 individual cooking zones

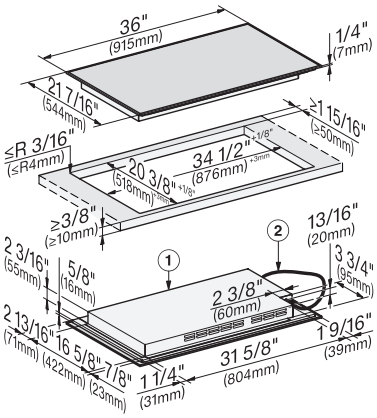

KM7740FR – with frame, surface mounted overlying installation (*footnote) – drawing

[?] Front, [?] Flexible metal hose with power cords, L = 4' (1,200 mm)