

Hotte pour îlot de 42 po à auvent en verre

Ventilation

Available Products: FHPC4260LS

Available Colors: Acier inoxydable

Version: 08/22



## Spécifications du produit

### Système de ventilation

Direction de la décharge d'air	Vertical
Ventilation sans conduit	Oui
Vitesses du ventilateur d'extraction	3
Capacité maximale de la circulation d'air	400 PCM
Évaluation maximale des sones	6.54 sone
Filtre à charbon inclus	Non

### Système d'éclairage de surface

Type d'éclairage	Halogène
Nombre de lumières	4

### Spécifications électriques

Tension nominale	120 V
------------------	-------

### Certifications et approbations de sécurité

Classé cUL	Oui
------------	-----

### Commandes

Type de commande	Mécanique
------------------	-----------

### Dimensions et volume


Hauteur	30 po
Hauteur avec extension du conduit d'air	42 po
Largeur	41.875 po
Profondeur	23.625 po
Diamètre du conduit	6 po

### Spécifications générales

Étiquette Prop 65	Oui
Niveau sonore	67.1 dB
Garantie - Main-d'œuvre	1 Year
Garantie - Pièces	1 Year

## Schéma d'installation

### PRE-INSTALLATION CALCULATIONS

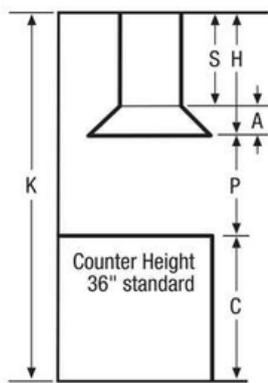

- K = Kitchen height
- C = Counter height
- P = Preferred height of hood bottom above counter (24" - 36" allowed, NOT more than 32" recommended)
- A = Canopy height
- H = Hood height for installation
- H = K - C - P
- S = Chimney structure height for installation
- S = H - A

Dimensions from base of hood to ceiling, and include clearance required for installation.

