FRIGIDAIRE.



30" Gas Range with Quick Boil

Gas Range

Available Products: FCRG3062AB, FCRG3062AS, FCRG3062AW

Available Colors: Black, Stainless Steel, White

Version: 10/25

Product Specifications

Cooking Controls		Cooking Controls Function	
Bake	Yes	Adjustable Volume Feedback	Yes
Broil	Yes	Change between Continuous Bake Setting or 12-Hour	V
Clock	Yes	Energy Saving Feature	Yes
Cook Time	Yes	Delayed Bake	Yes
Delay Clean	Yes	Program Fahrenheit or Celsius	Yes
Delay Start	Yes		
Keep Warm	Yes	Cooktop	
Kitchen Timer	Yes	Cooking Surface Type	Gas
Light	Yes	Grate Material	Cast Iron
Lockout	Yes	Grate Quantity	3
Off	Yes	Grate Style	Continuous
Oven Light	Yes	Total Number of Burners	5
Set Clock	Yes		
Start	Yes	Drawer	
Steam Clean	Yes	Drawer Handle Style	Integrated
Temperature Display	Yes	Drawer Type	Storage
Timer On / Off	Yes		Storage
Up / Down Arrow	Yes	— Display	
User Preferences	Yes	Control Location	Rear
		Display Interface Color	White
Oven		Display Type	Membrane
Bake Element	17000 BTU	Display Type	Wiembrane
Broil Element	1400 Watts	Electrical Specifications	
Broil Element Pass	6	Minimum Circuit Required	12 Amps
Number of Rack Positions	6	Voltage Rating	120 V
Oven Interior Color	Midnight Black	voitage Rating	120 V
Oven Light Quantity	1		
Oven Light Type	Halogen	— General Specifications	77
Oven Light Watts	40 Watts	Prop 65 Label	Yes
Rack Position Type	Embossed	Warranty - Labor	1 Year
Rack Type 1	Flat	Warranty - Parts	1 Year
Rack Type 1 Quantity	2		
• • •		Right to Repair Details	
Cooktop Performance			Partially Available - Visit
Right Front Element Burner	18000 BTU	Right to Repair	frigidaire.ca/right-to-
0	5000 BTU		repair for more
Right Rear Element Burner	3000 D1 U		
Right Rear Element Burner Left Front Element Burner			information
Right Rear Element Burner Left Front Element Burner Left Rear Element Burner	14000 BTU 10000 BTU		information

Controls Control Lock 30" Gas Range with Quick Boil

Available Products: FCRG3062AB, FCRG3062AS,

Available Colors: Black, Stainless Steel, White

Version: 10/25

FCRG3062AW

Dimensions and Volume			
Minimum Height	46 3/4"		
Maximum Height	47 3/4"		
Width	30"		
Depth	26"		
Depth With Door 90° Open	47 5/16"		
Depth With Handle	28 1/2"		
Oven Interior Height	17 5/8"		
Oven Interior Width	25 3/16"		
Oven Interior Depth	19 7/8"		
Oven Capacity	5.1 Cu. Ft.		
Installation			
Adjustable Leveling Legs	Yes		
Power Cord Included	Yes		
Safety Certifications and Approvals			
CSA Listed	Yes		


Available Products: FCRG3062AB, FCRG3062AS,

FCRG3062AW

Version: 10/25

Available Colors: Black, Stainless Steel, White

Installation Diagram

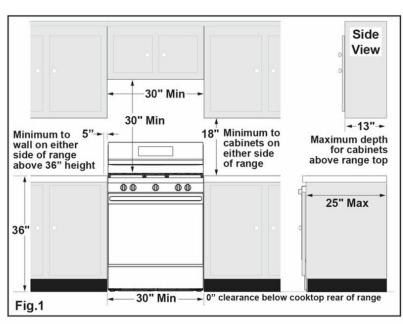

*30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND INCORRECT COUNTERTOP AND CABINET CUTS.

