
FISHER & PAYKEL

DATA SHEET
Vacuum Seal Drawer, 24" - Minimal style


Model no:
VB24SDEB1
(refer page 2 for metric measurements)

Product Dimensions	**in**
Ⓐ Overall height of vacuum drawer	5 1/2"
Ⓑ Overall width of vacuum drawer	23 7/16"
Ⓒ Overall depth of drawer (includes front panel & power plug)	22 1/4"
Ⓓ Height of drawer front panel	5 3/8"
Ⓔ Width of chassis (includes side brackets)	21 7/8"
Ⓕ Depth of drawer front panel and flange	13/16"
Ⓖ Depth of chassis (includes power plug, excludes flange)	21 7/16"
Ⓗ Distance from side bracket to side of drawer front	13/16"
Ⓘ Distance between flange and side bracket	14 1/16"
Ⓙ Depth of open drawer (measured from front of drawer panel)	16 5/16"
Ⓚ Height from bottom of chassis to bottom of front panel	1/16"

Clearance Dimensions	**in**
Minimum inside height of cavity	5 9/16"
Minimum inside width of cavity	22 1/16"
Minimum inside depth of cavity	21 5/8"
Overall width of cabinetry	23 5/8"
Minimum clearance between top of front panel and upper cabinetry panel	1/8"
Minimum clearance between bottom of front panel and lower cabinetry panel	1/16"

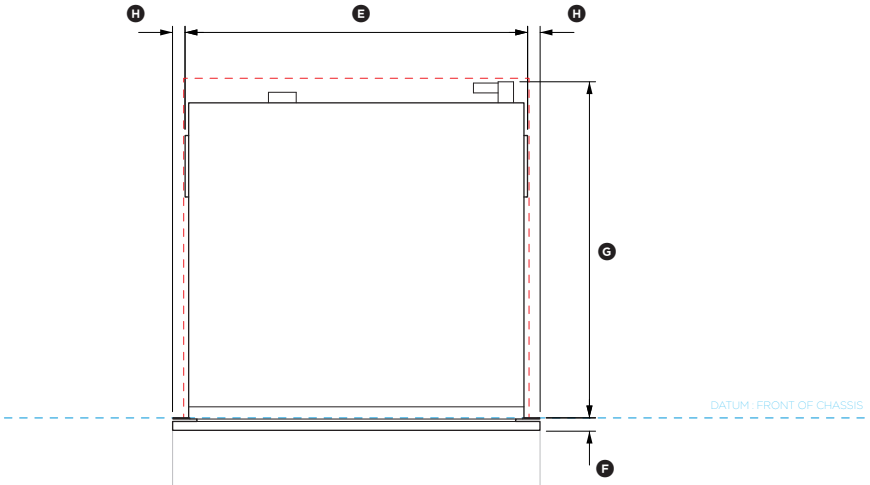


PLAN VIEW

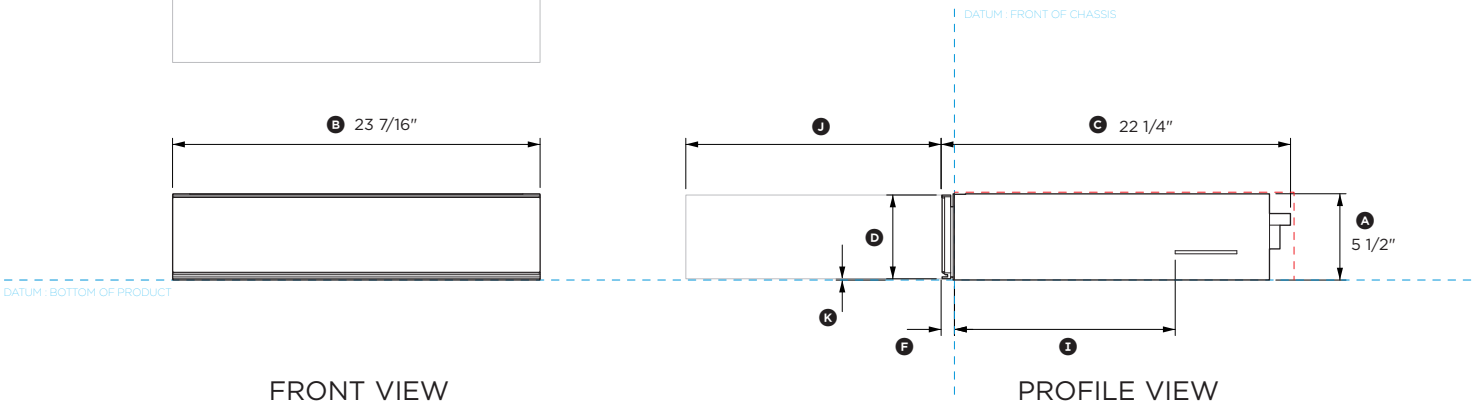

FRONT VIEW

PROFILE VIEW



INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **07.04.2021**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

DATA SHEET
Vacuum Seal Drawer, 24" - Minimal style


Model no:
VB24SDEB1
(refer page 1 for imperial measurements)

Product Dimensions	**mm**
Ⓐ Overall height of vacuum drawer	140
Ⓑ Overall width of vacuum drawer	596
Ⓒ Overall depth of drawer (includes front panel & power plug)	565
Ⓓ Height of drawer front panel	136
Ⓔ Width of chassis (includes side brackets)	556
Ⓕ Depth of drawer front panel and flange	20
Ⓖ Depth of chassis (includes power plug, excludes flange)	545
Ⓗ Distance from side bracket to side of drawer front	20
Ⓘ Distance between flange and side bracket	358
Ⓙ Depth of open drawer (measured from front of drawer panel)	414
Ⓚ Height from bottom of chassis to bottom of front panel	2

Clearance Dimensions	**mm**
Minimum inside height of cavity	142
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Overall width of cabinetry	600
Minimum clearance between top of front panel and upper cabinetry panel	3
Minimum clearance between bottom of front panel and lower cabinetry panel	2

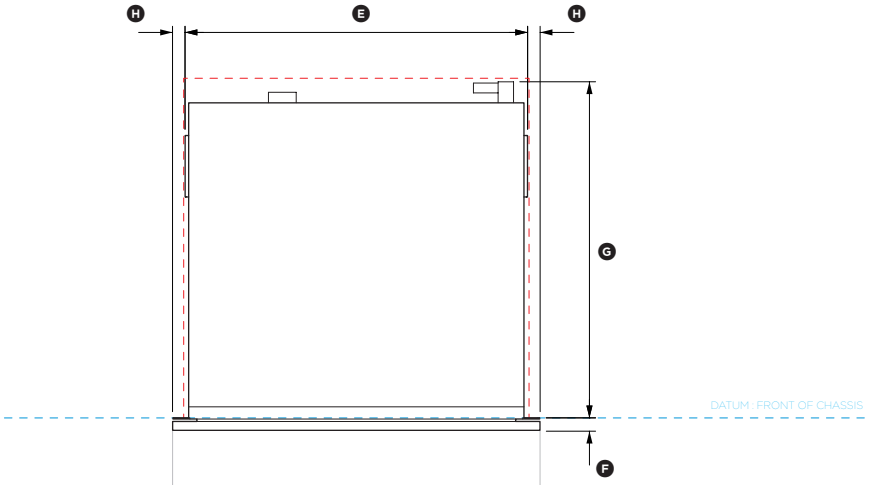


PLAN VIEW

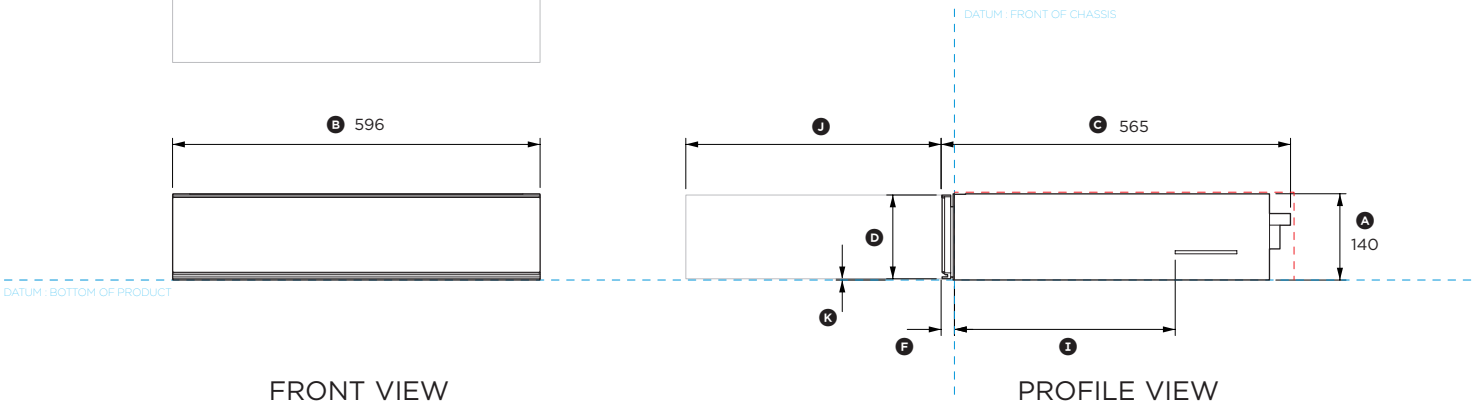

FRONT VIEW

PROFILE VIEW



INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **07.04.2021**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com