

FISHER & PAYKEL


DATA SHEET
36" Professional Gas Cooktop

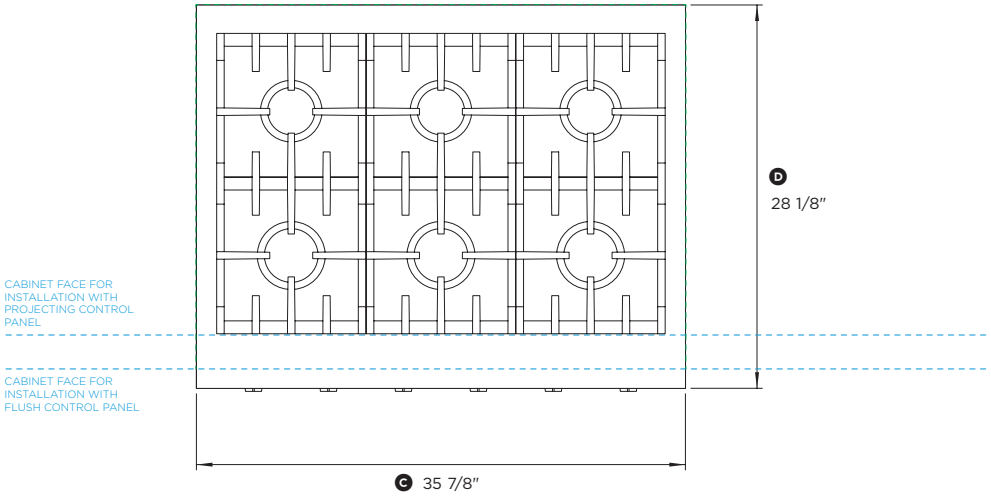

PLAN VIEW

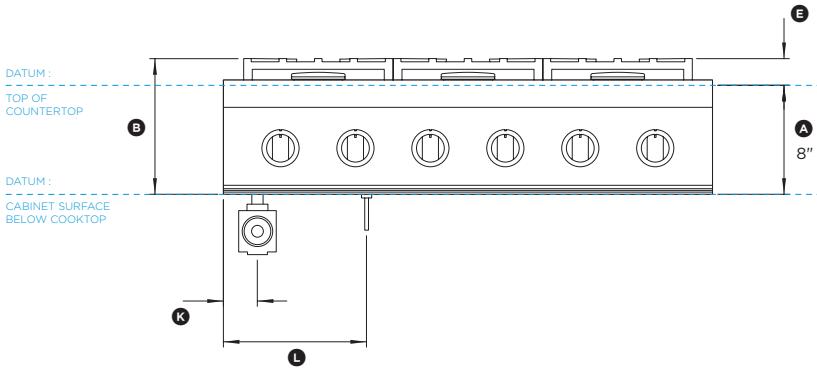

FRONT VIEW

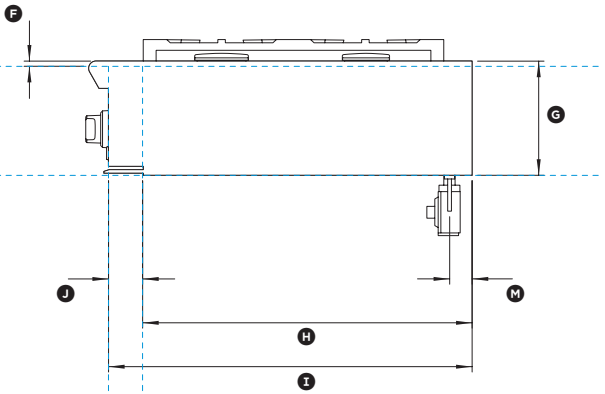

PROFILE VIEW



CABINET FACE FOR INSTALLATION WITH FLUSH CONTROL PANEL

CABINET FACE FOR INSTALLATION WITH PROJECTING CONTROL PANEL

Model no:
CPV2-366
(refer page 3 for metric measurements)

Product Dimensions	**in**
Ⓐ Height below countertop datum to bottom of chassis	8"
Ⓑ Overall height of product (bottom of chassis to top of grates)	9 15/16"
Ⓒ Overall width of cooktop	35 7/8"
Ⓓ Overall depth of cooktop	28 1/8"
Ⓔ Height above countertop datum to top of grates	1 15/16"
Ⓕ Height from countertop datum to chassis top surface	3/8"
Ⓖ Height of chassis	8 3/8"
Ⓗ Depth from rear of chassis to cabinetry datum – projecting	24 3/16"
Ⓘ Depth from rear of chassis to cabinetry datum – flush	26 11/16"
Ⓙ Depth of control panel	2 1/2"
Ⓚ Distance from left edge of chassis to center line of gas inlet	2 1/2"
Ⓛ Distance from left edge of chassis to center line of power cord	10 1/2"
Ⓜ Distance from rear edge of chassis to center line of gas/power	1 5/8"

Cutout Dimensions	**in**
Overall height of cutout	8"
Overall width of cutout	min 36"
Overall depth of cutout for projecting control panel	max 24 3/16"
Overall depth of cutout for flush control panel	max 26 11/16"


INDICATES CABINETRY DATUM ----------
INDICATES CUTOUT ----------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
36″ Professional Gas Cooktop

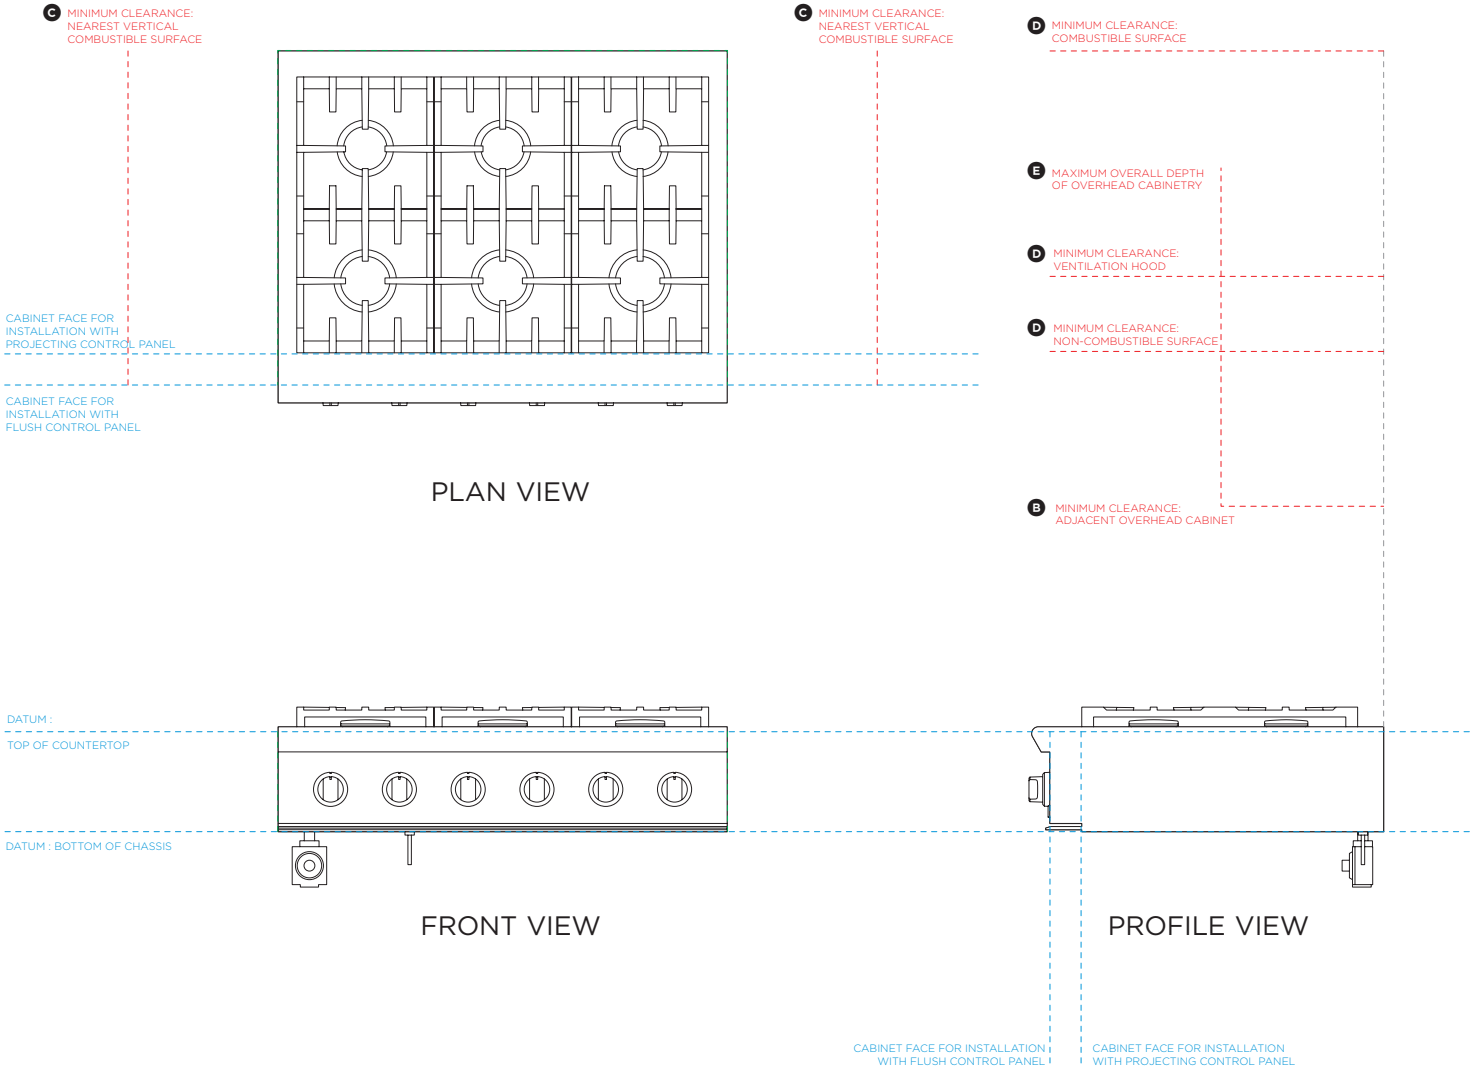

Model no:
CPV2-366
(refer page 4 for metric measurements)

Cabinetry Dimensions	**in**
Ⓐ Minimum width of ventilation hood installed above cooktop – not shown*	36″
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	18″
Ⓒ Minimum clearance from left and right edge of range to nearest vertical combustible surface	12″
Ⓓ Minimum clearance from cooking surface to:	
– combustible surface centered above the cooking surface	54″
– combustible covering for ventilation hood centered above the cooking surface	36″
– non-combustible surface centered above the cooking surface	30″
Ⓔ Maximum overall depth of overhead cabinetry	13″


INDICATES CABINETRY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16″). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
36" Professional Gas Cooktop

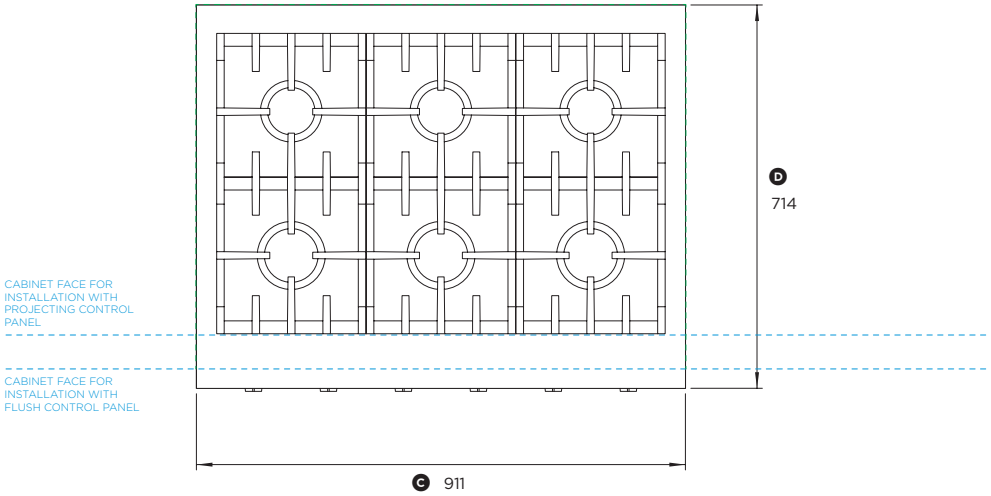

PLAN VIEW

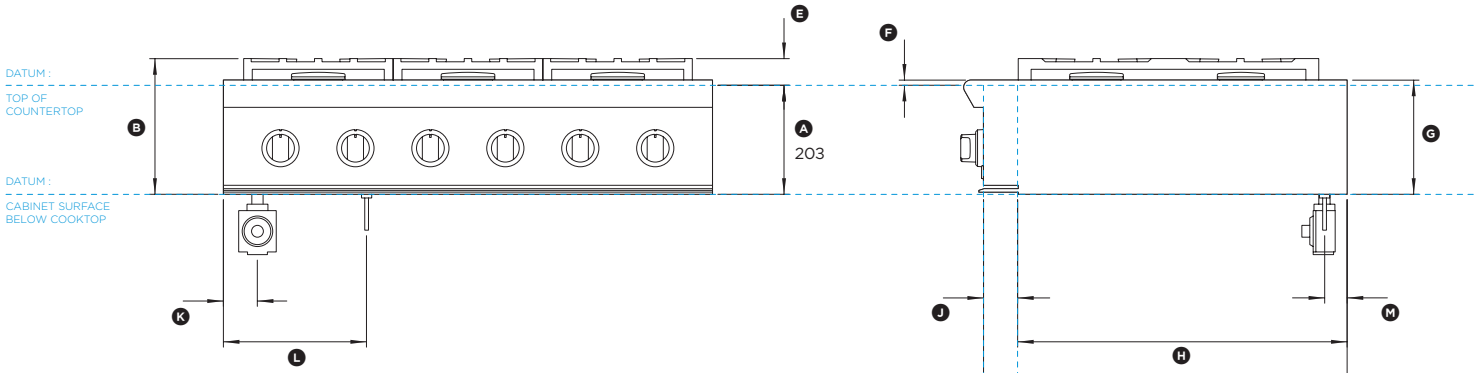

FRONT VIEW

PROFILE VIEW



CABINET FACE FOR INSTALLATION WITH FLUSH CONTROL PANEL

CABINET FACE FOR INSTALLATION WITH PROJECTING CONTROL PANEL

Model no:
CPV2-366
(refer page 1 for imperial measurements)

Product Dimensions	**mm**
Ⓐ Height below countertop datum to bottom of chassis	203
Ⓑ Overall height of product (bottom of chassis to top of grates)	253
Ⓒ Overall width of cooktop	911
Ⓓ Overall depth of cooktop	714
Ⓔ Height above countertop datum to top of grates	50
Ⓕ Height from countertop datum to chassis top surface	10
Ⓖ Height of chassis	213
Ⓗ Depth from rear of chassis to cabinetry datum – projecting	614
Ⓘ Depth from rear of chassis to cabinetry datum – flush	677
Ⓙ Depth of control panel	64
Ⓚ Distance from left edge of chassis to centre line of gas inlet	63
Ⓛ Distance from left edge of chassis to centre line of power cord	267
Ⓜ Distance from rear edge of chassis to centre line of gas/power	42

Cutout Dimensions	**mm**
Overall height of cutout	203
Overall width of cutout	min 914
Overall depth of cutout for projecting control panel	max 614
Overall depth of cutout for flush control panel	max 678


INDICATES CABINETRY DATUM ----------
INDICATES CUTOUT ----------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
36" Professional Gas Cooktop

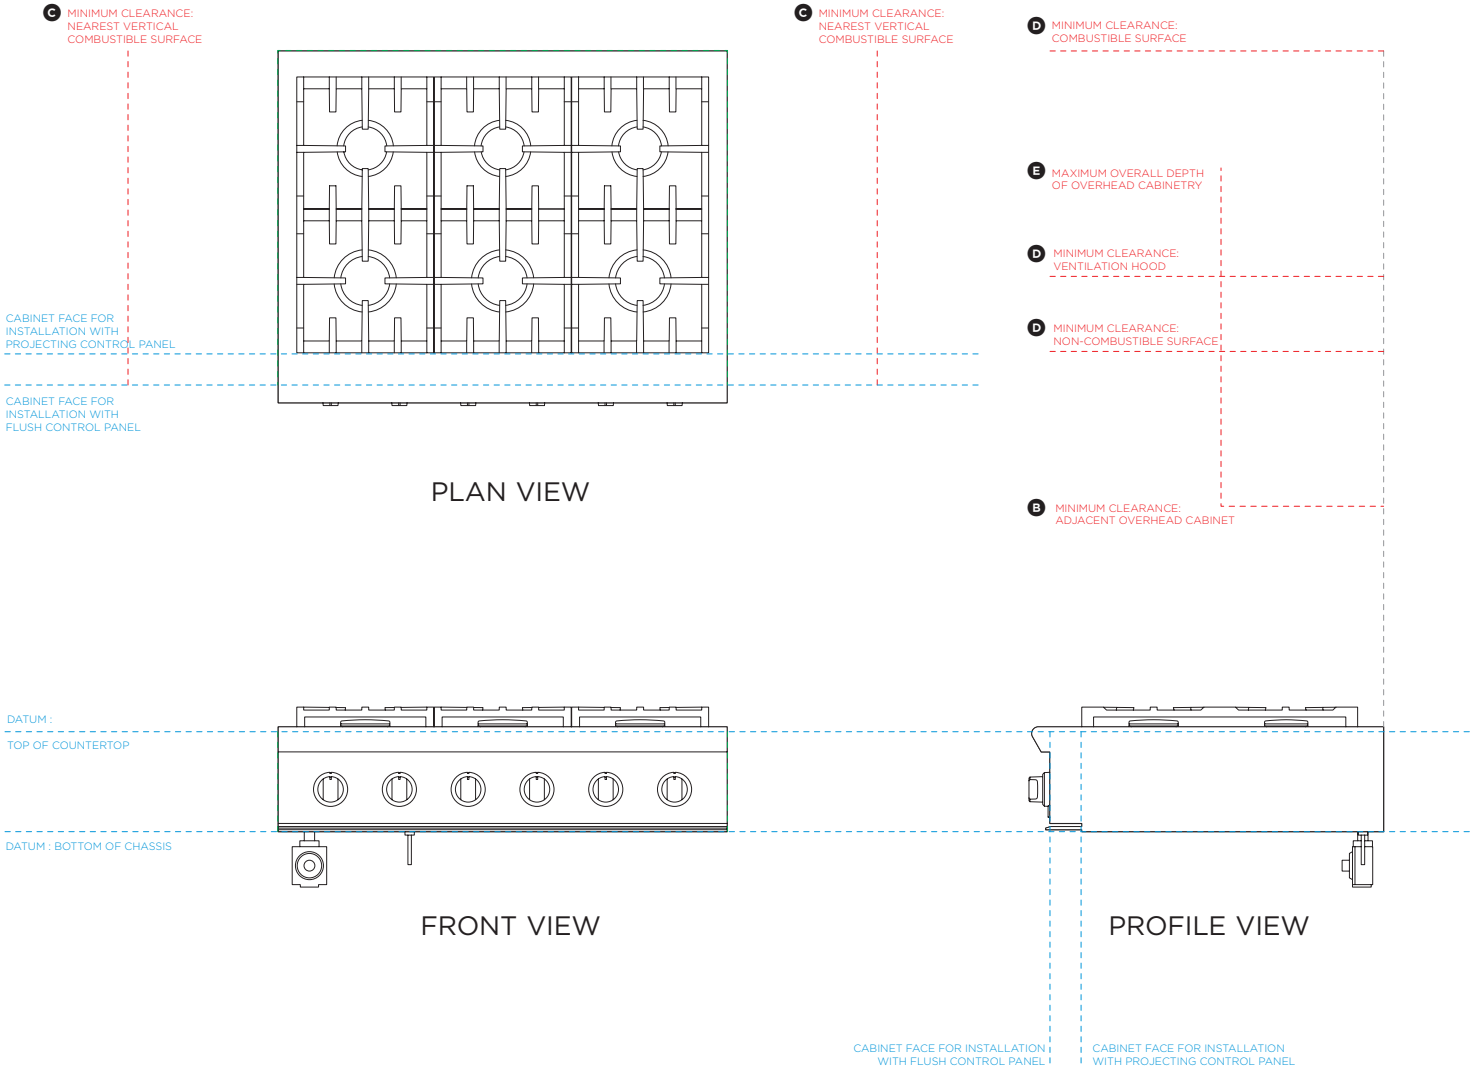

Model no:
CPV2-366
(refer page 2 for imperial measurements)

Cabinetry Dimensions	**mm**
Ⓐ Minimum width of ventilation hood installed above cooktop – not shown*	914
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	457
Ⓒ Minimum clearance from left and right edge of range to nearest vertical combustible surface	305
Ⓓ Minimum clearance from cooking surface to:	
– combustible surface centered above the cooking surface	1372
– combustible covering for ventilation hood centered above the cooking surface	914
– non-combustible surface centered above the cooking surface	762
Ⓔ Maximum overall depth of overhead cabinetry	330

INDICATES CABINETRY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com